



EVO

The first separable
switch-disconnector



 **MARECHAL**
ELECTRIC



SUMMARY



A UNIQUE PRODUCT.

Once again, **MARECHAL ELECTRIC** is at the heart of innovation with the invention of the first separable switch-disconnector.

For even more safety, **EVO** facilitates the compliance of your machines and equipments.

Discover "**EVO**", our new ergonomic and modern invention, created for you.

EVO TWIST & SWITCH	3
ITS PARTICULARITY	4
ITS USE	5
ITS CONFIGURATIONS	6
ITS APPLICATIONS	7
ITS ADVANTAGES	8
ITS TECHNOLOGY	9
TECHNICAL CHARACTERISTICS	10
PART NUMBERS	11




EVO TWIST & SWITCH

A SEPARABLE
SWITCH-
DISCONNECTOR





ITS
PARTICULARITY

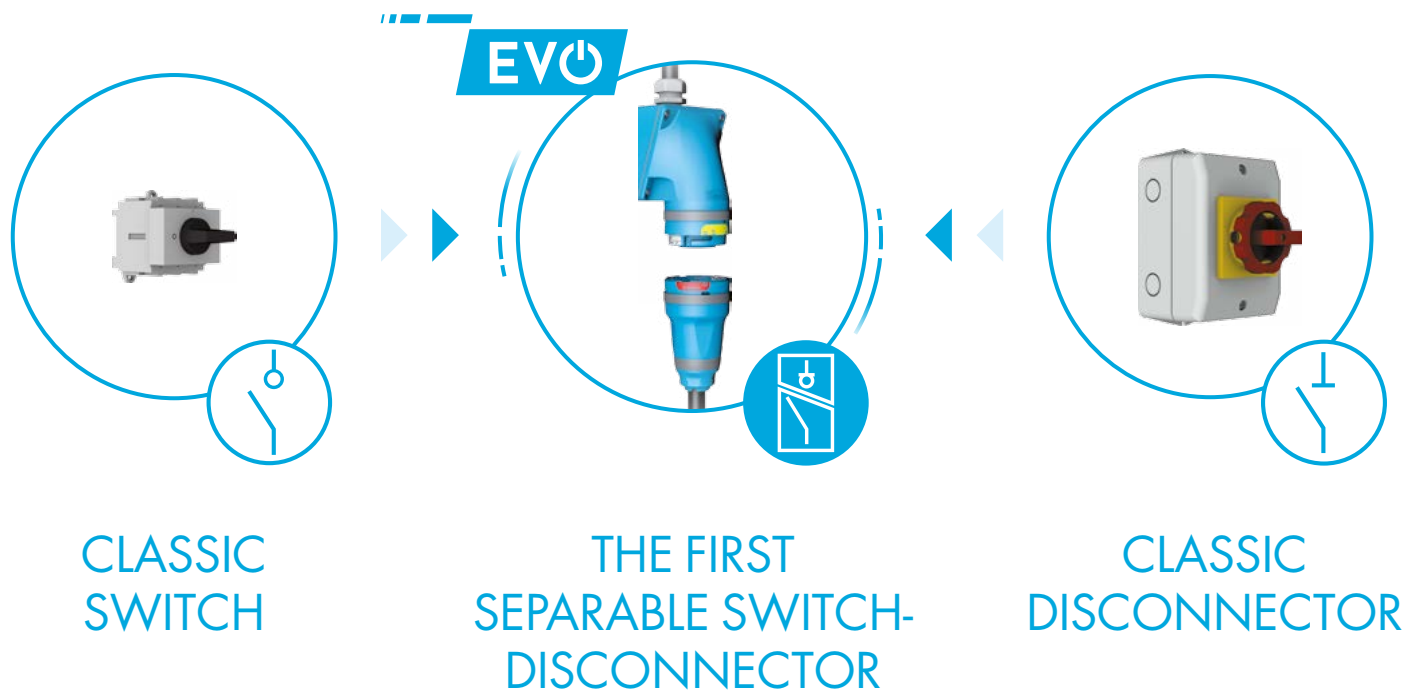

TWIST & SWITCH


POSITIVE AND CLEARLY VISIBLE BREAKING

AUTOMATIC IP66/IP67 WATERPROOFING IN THE ON AND OFF POSITIONS

SLEEK DESIGN

REDUCES SPACE REQUIREMENTS

REDUCES INSTALLATION COSTS AND DOWNTIMES

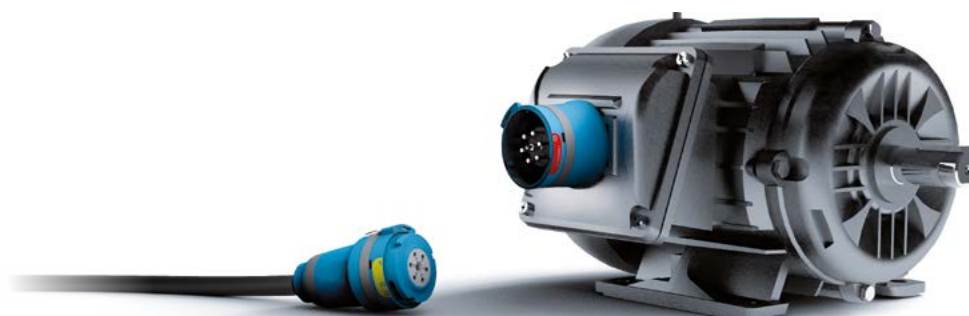



ITS
USE

LOAD BREAK ROTARY SWITCH

- Simple operation
- Waterproof in ON and OFF positions

Separated position




Position 00



Position OFF



Position ON

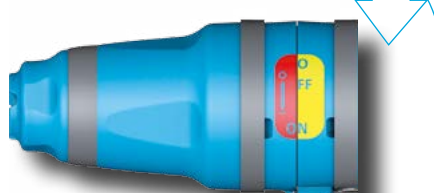




ITS CONFIGURATIONS


EVO

POSSIBLE
INSTALLATIONS


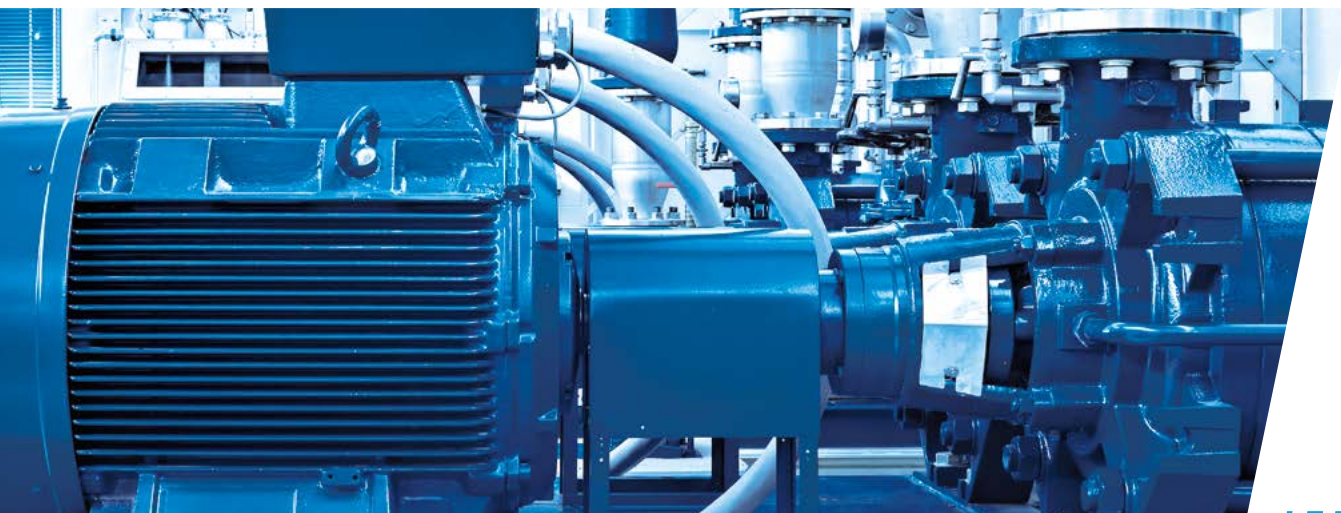





ITS APPLICATIONS

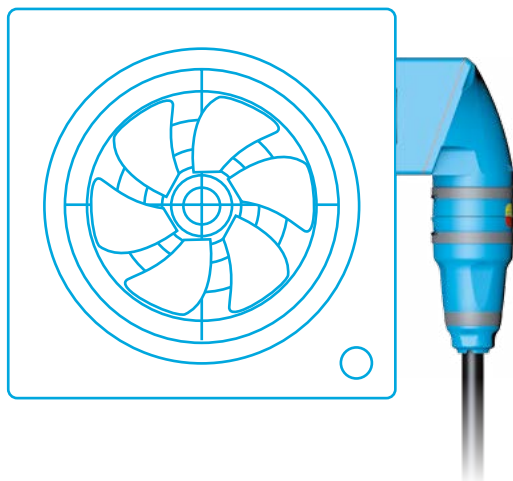

EVO40 is particularly appropriate for all industrial applications such as motor power supply.

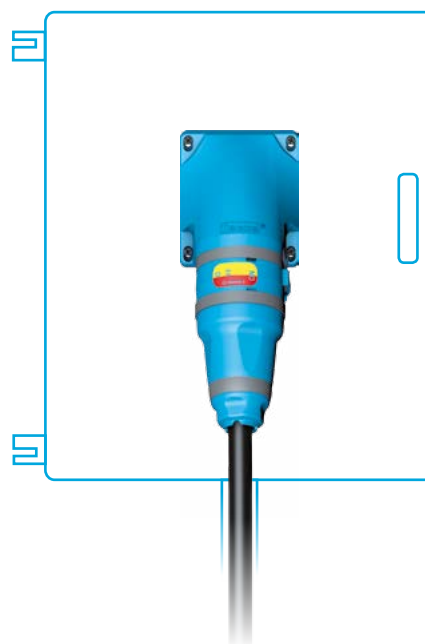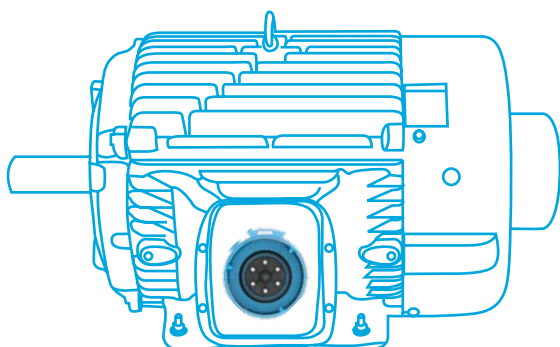

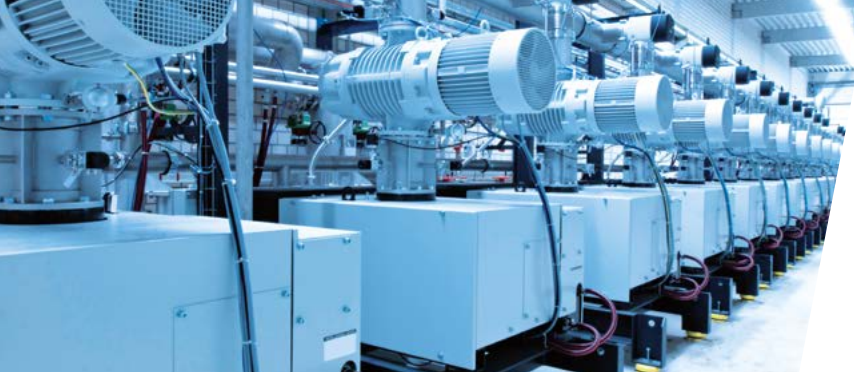

ITS ADVANTAGES

KEY FEATURES

THE BENEFITS

Padlockable in OFF position	Simplification and economy
Positive and visible breaking	100% ensured safety
Disconnection speed independent of operator use	Reliability Ease of use
IP66/IP67 sealing in ON and OFF position and in separate position with caps	Suitable for harsh industrial environments
IP4X on source side	User safety and compliance with standards
Smooth crevice free design, no visible fixing screws	Easy to clean
Up to 6 poles + earth	Ability to connect power and/or control signals
Surface mounting dimension limited to 120 mm	Compact design (50° or 90° version wall box)





ITS TECHNOLOGY

Double break per pole
AC-22A/AC-23A (18,5 kW)
AC-3 (11 kW)

Cage terminals improving conductivity
and vibration resistance

Colour Coded terminals
1, 2, 3, 4/N, 5, 6

Ergonomic handle
Screwless fixings


IP4X safety shutter
Protection from live
parts


Contacts on silver alloy
tips (anti-corrosion
treatment)

Protective cover

Glass reinforced poly enclosure

IP66/IP67 automatic waterproofing
in ON and OFF positions

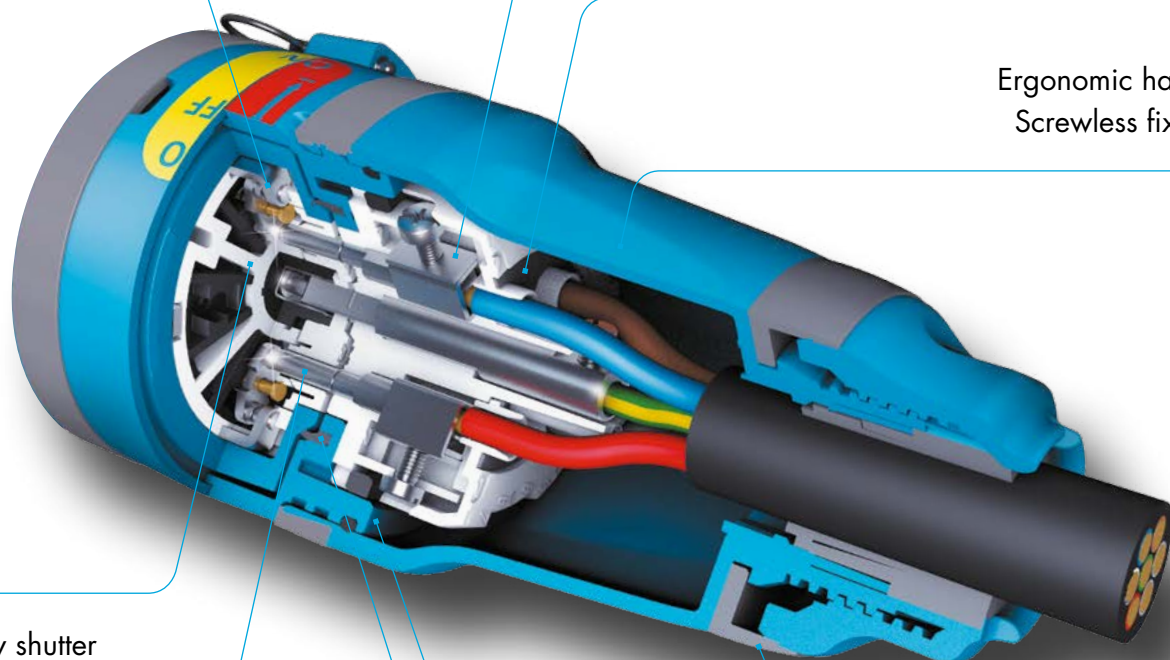

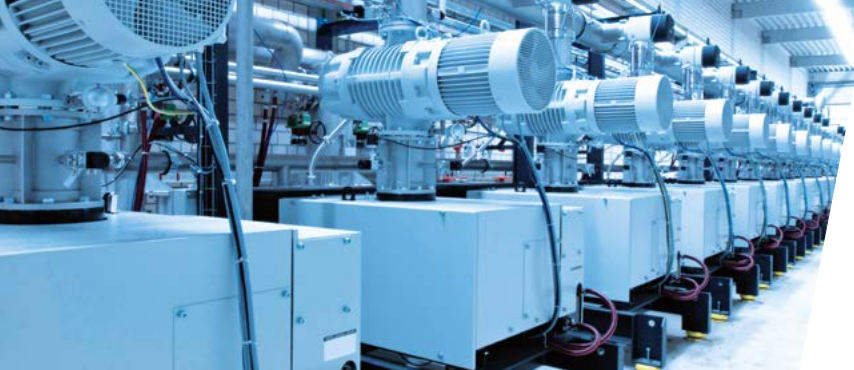

TECHNICAL CHARACTERISTICS

Electrical endurance	15 000 cycles*
U_i : Rated insulation voltage	1 000 V AC
U_{max} : Operational voltage	690 V
I_{the} : Conventional enclosed thermal current	40 A
U_{imp} : Rated impulse withstand voltage	8 kV
I_{cc} : Rated short-circuit breaking current capacity with gG fuses and aM fuse	100 kA
I_{cm} : Rated short-circuit making current capacity	1 kA
Cable cross-section Cu	2,5 - 10 mm ² flexible
	2,5 - 16 mm ² stranded
Degree of protection (IEC 60529)	IP66/IP67
Shock resistance (IEC 62262)	IK09
Ambient air temperature	- 25 °C/+ 60 °C

* In AC-23A 690 V AC/40 A service operation.

SWITCHING CAPACITY

kW/V	230 V	400 V	690 V
AC-21A/AC-22A	40 A	40 A	40 A
AC-23A	11 kW	18,5 kW	18,5 kW
AC-3	7,5 kW	11 kW	11 kW

COMPLIANT WITH STANDARDS

• IEC/EN 60947-1/-3/-4/-5 :

Low-voltage switchgear and control gear:
Switches, disconnectors, switch-disconnectors
and fuse-combination units.

• Facilitates compliance:

- of electrical machinery to the European Machinery Directive 2006/42/CE, to EN 12100 and EN 60204-1 standards,
- of electrical installations to IEC/HD 60364 and NF C 15-100 standards.










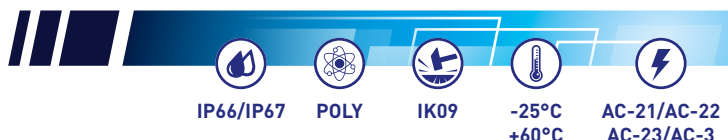

PART NUMBERS

40 A

690 V U MAX I

SEPARABLE SWITCH-DISCONNECTOR



							
Voltage	Poles	Supply	Load	Straight sleeve	70° inclined sleeve	Handle ⁽¹⁾	90° wall box ⁽²⁾
200-250 V AC	2P+E	8144032	8148032	51LM0	51LM7	51LP0D21	51LC9000
	3P+E	8144033	8148033				
	4P+E	8144034	8148034				
	6P+E	8144036	8148036				
380-480 V AC	2P+E	8144012	8148012	51LM0	51LM7	51LP0D21	51LC9000
	3P+E	8144013	8148013				
	4P+E	8144014	8148014				
	6P+E	8144016	8148016				
500-690 V AC	2P+E	8144052	8148052	51LM0	51LM7	51LP0D21	51LC9000
	3P+E	8144053	8148053				
	4P+E	8144054	8148054				
	6P+E	8144056	8148056				
Umax 690 V AC	2P+E	8144122	8148122	51LM0	51LM7	51LP0D21	51LC9000
	3P+E	8144123	8148123				
	4P+E	8144124	8148124				
	6P+E	8144126	8148126				
Load side cap IP66/IP67 padlockable		Included	814A426G				

(1) Gland size 5-21 mm.

(2) Without drilling, top entry. Reversible wall box for 50° angle with bottom entry.



A padlocking key is supplied with each supply/load.

ADDITIONAL PADLOCKING KEYS



Packaging = 10

814A541


SAFETY HASP FOR UP TO 6 PADLOCKS



613A541



WORLD PRESENCE

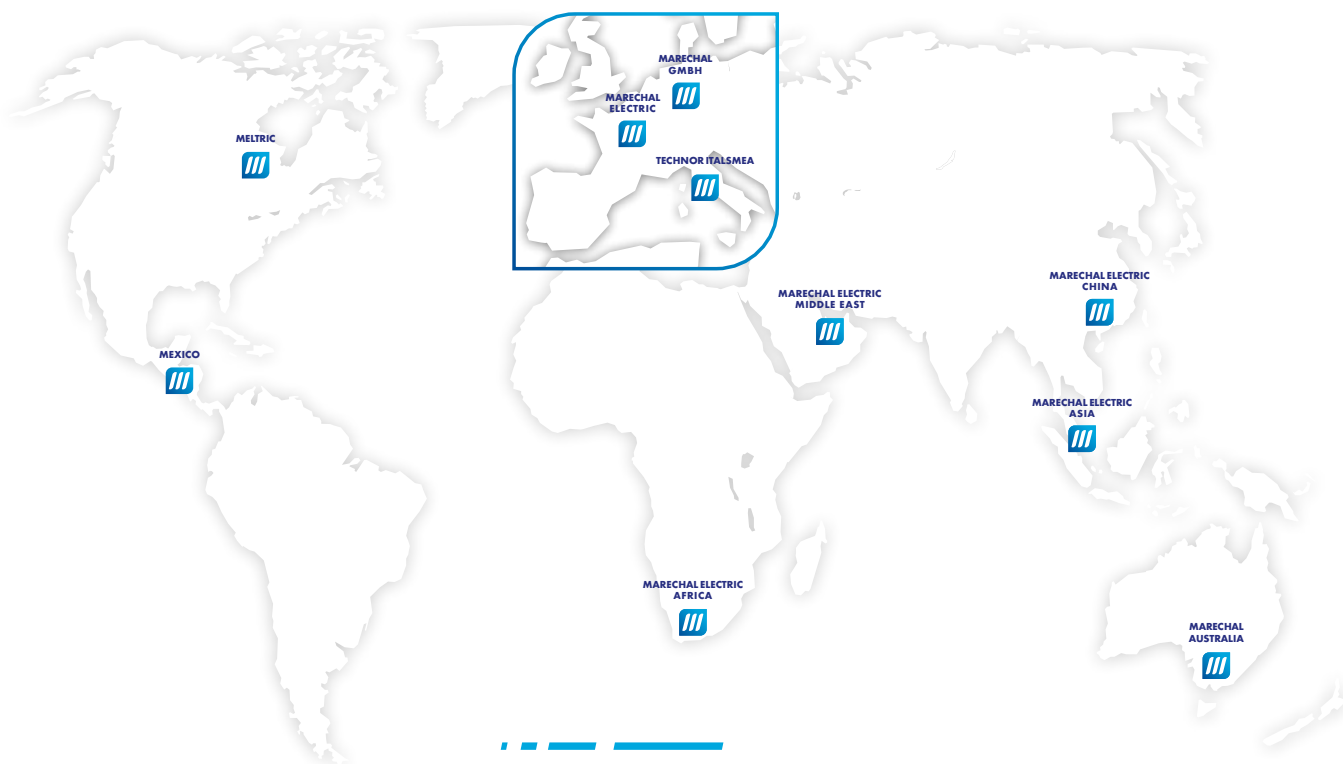

MARECHAL ELECTRIC S.A.S. (Head Office)

5 avenue du chemin de Presles
94410 Saint-Maurice, FRANCE
Phone : +33 (0)1 45 11 60 00
e-mail: contact@marechal.com

Africa SADC area

MARECHAL ELECTRIC AFRICA (PTY) LTD.
PO Box 13875 Witfield 1467
Unit A1 Harvard Lane
Aero Star Business Park
Jet Park Road, Jet Park, South Africa
Tel.: +27 11 894 7226/7/8
e-mail: sales.za@marechal.com

Asia

MARECHAL ELECTRIC Asia Pte Ltd
9 Tagore Lane
#01-05 9@Tagore
Singapore 787472
Tel.: +65 6554 2722
e-mail: sales.asia@marechal.com

Australia

MARECHAL AUSTRALIA PTY LTD
20 A Technology Circuit
HALLAM VIC 3803
Australia
Tel. : +61 (0)38786 2500
e-mail : sales@marechal.com.au

China

MARECHAL ELECTRIC (China) Co., Ltd
11 North Xiangshui Road,
West Dayawan District,
Huizhou PRC
Tel: +86 (0)752-5319536
e-mail: sales.cn@marechal.com

Germany/Austria/Switzerland/Eastern Europe/Russia

MARECHAL GmbH
Im Lossenfeld 8
D-77731 Willstätt-Sand
Germany
Tel.: +49 (0)7852/91 96-0
e-mail: info.de@marechal.com

Middle East

MARECHAL ELECTRIC Middle East
Trading LLC
80 Street, Shed-01B ALFA3 Complex
Jebel Ali Industrial 1 - Dubai, UAE
Tel : +971 4 226 8400418
e-mail : sales.me@marechal.com

USA/Canada

MELTRIC Corporation
4765 W. Oakwood Park Drive
Franklin WI 53132, USA
Tel.: +1 414 433 2700
e-mail: mail@meltric.com

Mexico

MELTRIC Corporation
Insurgente Sur 863 - Piso 7
Napoles, Benito Juarez,
D. F. Mexico, C.P 03810
Tel.: +52 55 50056752
e-mail : mail@meltric.com

TECHNOR ITALSMEA S.p.A.

Via Italia 33,
20060 Gessate (Milano),
Italia
Tel. : +39 02 95 00 151
e-mail : sales@italsmea.com

For any other country or area, please contact the head office.

marechal.com

 **MARECHAL**
ELECTRIC
MARECHAL® TECHNOR® MELTRIC®