

50 A

500 V
U_{MAXI}

FLAT CONNECTOR FC



IP54



6 - 10 mm²



GRP



IK09



-40 °C
+60 °C

Suitable for flat cables with width between 26 mm and 40 mm and height between 7 mm and 11 mm

OTHER FEATURES

Polarity	4P+E
Flexible wiring (min.-max.)	6 - 10 mm ²
Stranded wiring (min.-max.)	6 - 10 mm ²
Number of operations	2000 cycles
IP protection plug connected	IP54
IP protection disconnected	IP2X

REFERENCES AND ACCESSORIES


SOCKET-OUTLET female
FC




INLET male
FC



500 V AC	4+E	05F4007	05F8007
----------	-----	---------	---------

ACCESSORIES	Reference
HANDLES	
	01FA013 Adapter accessory for 5G6 flat cables is included.

DRAWINGS AND DIMENSIONS

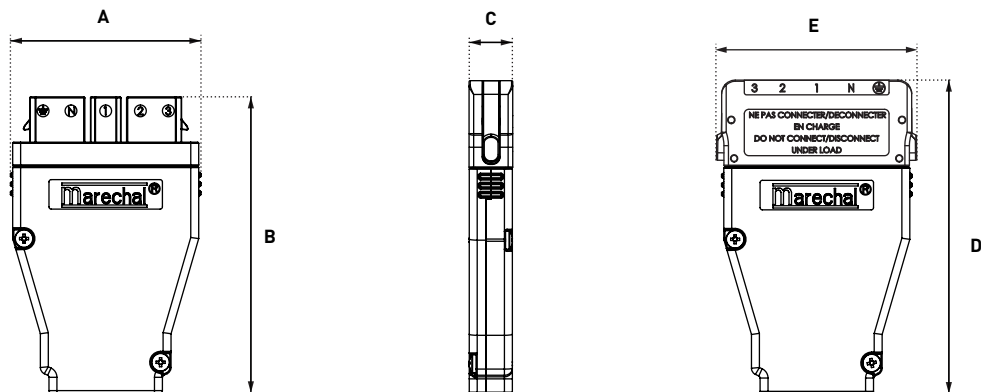

A	B	C	D	E
84	131	19	138	89