



RETTBOX® RETTBOX®-Air

RELIABLE, DURABLE, ELECTRIC AND COMPRESSED
AIR SUPPLY FOR EMERGENCY VEHICLES





ELECTROMAGNETIC SELF-EJECT DECONTACTOR™

A

20 A/32 A

- ▶ For all types of emergency vehicles
- ▶ DECONTACTOR™ for power supply with secure/ automatic ejection RETTBOX® or power supply with compressed air RETTBOX®-Air
- ▶ AISI 316 L stainless steel housing with electromagnetic coil (12 V DC-24 V DC)
- ▶ Automatic ejection of the coupler socket upon start-up of the vehicle
- ▶ 5 pin connector for Anti-start function
- ▶ Voltage presence indicator
- ▶ RETTBOX®-Air : Compressed air supply up to 13 bar
- ▶ More than 10,000 matings tested (20 A)



RETTBOX®

Power supply unit with an automatic ejection mechanism activated upon start-up of the vehicle. After ejection, both the plug and the socket are automatically IP55 protected. The contacts of the plug and socket are silver-nickel butt contacts.

RETTBOX®-AIR

All-in-one power and compressed air supply unit with an automatic ejection mechanism activated upon start-up of the vehicle. After ejection, both the plug and the socket are automatically IP55 protected. The contacts of the plug and socket are silver-nickel butt contacts.

FIND ALL INFORMATION
ON OUR WEBSITE:




CHECK OUR RETTBOX® USER GUIDE,
TUTORIAL INSTALLATION VIDEO,
AND OUR INSTRUCTION SHEET.

MAIN FEATURES


	RETTBOX® (20 A)	RETTBOX®-Air (20 A)	RETTBOX® (32 A)	RETTBOX®-Air (32 A)
Front	stainless steel	stainless steel	stainless steel	stainless steel
Box	glassfiber reinforced polyamide	glassfiber reinforced polyamide	stainless steel	stainless steel
Protection mode (closed cover)	IP55	IP55	IP55	IP55
Self-closing coupler socket	IP55	IP55	IP55	IP55
Front dimensions (LxH) in mm	114 x 184	114 x 184	132 x 188	132 x 188
Cut-out dimensions on vehicle's frame (LxHxP) in mm	83 x 163 x 94	83 x 163 x 94	103 x 173 x 145	103 x 173 x 145
Coupler socket cable supplied	4 m	4 m*	4 m	4 m*
Auxiliary contacts (optional)	2 aux	1 aux	3 aux	3 aux
Weight (excluding coupler socket)	1 200 g	1 200 g	3 200 g	3 200 g
Built-in DECONTACTOR™	20 A	20 A	32 A	32 A
Compressed air duct	no	up to 13 bars	no	up to 13 bars

* with duct for compressed air

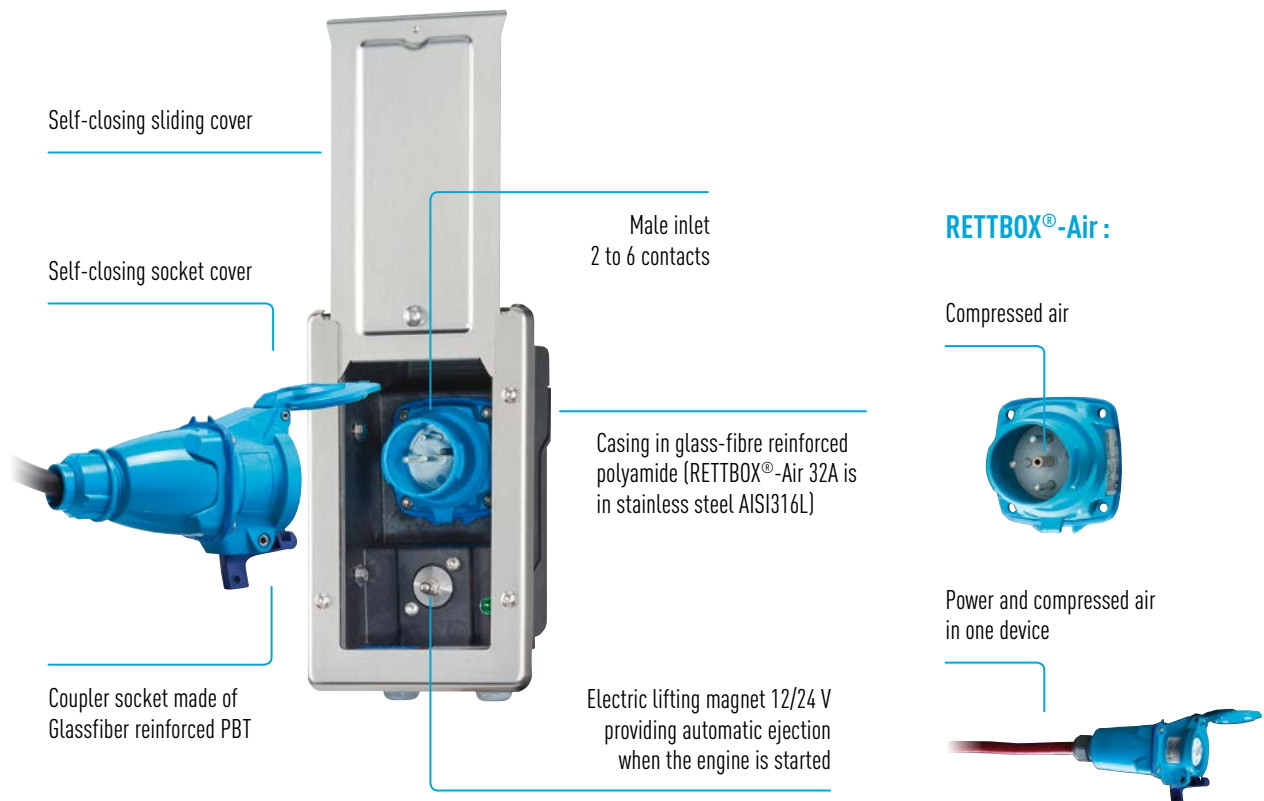

ENSURE SPEED AND SAFETY

- 1 Loading box connected to the electrical system of the vehicle.
- 2 Automatic ejection of the coupler socket upon start-up of the vehicle by way of an electric lifting magnet.
- 3 Protection against water and dust by means of a self-closing cover.





ENCLOSURE WITH INLET **RETTBOX®**



Box
6116015RK412U

COUPLER SOCKET **RETTBOX®**



Coupler socket
6113015RK4L

RETTBOX® (20 A)

ENCLOSURE WITH INLET
supplied with 4 m cable



**COUPLER
SOCKET**
pre-wired, cable
4 m included



230 V AC	1P+N+E	RETTBOX® with 12 V relay and male inlet	6116015 RK412U	6113015 RK4L
230 V AC	1P+N+E	RETTBOX® with 24 V relay and male inlet	6116015 RK424U	6113015 RK4L
230 V AC	1P+N+E+2 aux.	RETTBOX® with 12 V relay and male inlet	6116175 RK412U	6113175 RK4L
230 V AC	1P+N+E+2 aux.	RETTBOX® with 24 V relay and male inlet	6116175 RK424U	6113175 RK4L
24 V AC	2P DC*	RETTBOX® with 24 V relay and male inlet	6116089 RK424U	6113089 RK4L
12 V AC	2P DC*	RETTBOX® with 12 V relay and male inlet	6116059 RK412U	6113059 RK4L

*LED not available for these configurations.

RETTBOX®-Air (20 A)

ENCLOSURE WITH INLET
supplied with 4 m cable - compressed air conduct up
to 13 bars



**COUPLER
SOCKET**
pre-wired, cable
4 m included



230 V AC	1P+N+E	RETTBOX® with 12 V relay and male inlet	6116015 AK412U	6113015 AK4L
230 V AC	1P+N+E	RETTBOX® with 24 V relay and male inlet	6116015 AK424U	6113015 AK4L
230 V AC	1P+N+E+1 aux.	RETTBOX® with 12 V relay and male inlet	6116215 AK412U	6113215 AK4L
230 V AC	1P+N+E+1 aux.	RETTBOX® with 24 V relay and male inlet	6116215 AK424U	6113215 AK4L
24 V AC	2P DC*	RETTBOX® with 24 V relay and male inlet	6116089 AK424U	6113089 AK4L
12 V AC	2P DC*	RETTBOX® with 12 V relay and male inlet	6116059 AK412U	6113059 AK4L

*LED not available for these configurations.
All versions are available in 4, 8 and 12m.

INFOS +

LED CONTROL LIGHT

RETTBOX® (20 A, 230 V) and RETTBOX®-Air (20 A, 230 V) feature a LED signal light that indicates the presence of charging voltage.





ENCLOSURE WITH INLET RETTBOX®



Box
3816187AK424U

COUPLER SOCKET RETTBOX®



Coupler socket
3813187AK4L

RETTBOX® (32 A)

ENCLOSURE WITH INLET
supplied with 4 m cable



COUPLER SOCKET
pre-wired, cable 4 m
included



230 V AC	1P+N+E+3 aux.	RETTBOX® with 24 V relay and male inlet	3816187RK424U	3813187RK4L
400 V AC	3P+N+E+1 aux.	RETTBOX® with 24 V relay and male inlet	3816247RK424U	3813247RK4L

RETTBOX®-Air (32 A)

ENCLOSURE WITH INLET
supplied with 4 m cable - compressed air conduct up
to 13 bars



COUPLER SOCKET
pre-wired, cable 4 m
included



230 V AC	1P+N+E+3 aux.	RETTBOX® with 24 V relay and male inlet	3816187AK424U	3813187AK4L
400 V AC	3P+N+E+1 aux.	RETTBOX® with 24 V relay and male inlet	3816247AK424U	3813247AK4L

ADDITIONAL EQUIPMENT

LEATHER PULL-GRIP (coupler socket)



611AZIE

CEILING BRACKET made of stainless steel



RETTBOX®
20 A

RETTBOX®-Air
20 A

RETTBOX®-Air
32 A

611AHUTRRR L


611AHUTAAA L

381AHUTAAA L

All versions are available in 4, 8 and 12m.


DIMENSIONS

	A	B	C	D	E	F	G	H	J
RETTBOX® 20 A	184	114	184	89	114	163	94	152	83
RETTBOX®-Air 20 A	184	114	184	89	114	163	94	152	83
RETTBOX® 32 A	188	132	197	140	151	173	116	169	103
RETTBOX®-Air 32 A	188	132	197	140	151	173	116	169	103

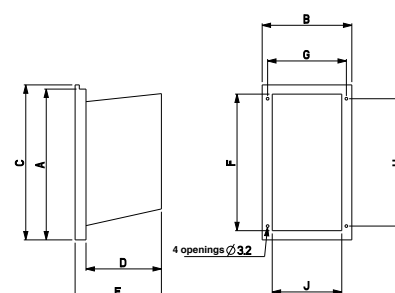



WORLD PRESENCE

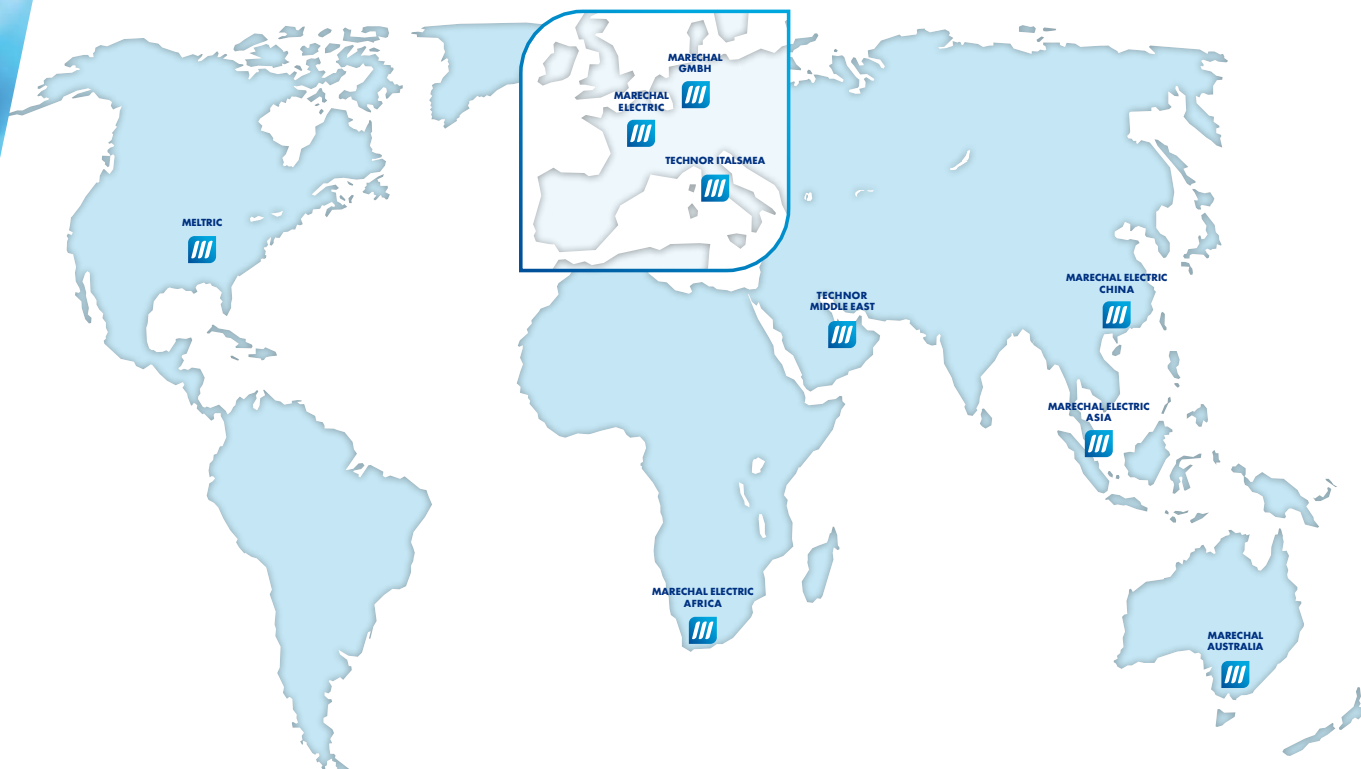

MARECHAL ELECTRIC S.A.S (Head Office)

5, avenue de Presles
94417 Saint-Maurice Cedex, FRANCE
Phone : +33 (0)1 45 11 60 00
Fax : +33 (0)1 45 11 60 60
e-mail: contact@marechal.com

Africa SADC area

MARECHAL ELECTRIC AFRICA (PTY) LTD.
PO Box 13875 Witfield 1467
Unit A1 Harvard Lane
Aero Star Business Park
Jet Park Road, Jet Park
South Africa
Tel.: +27 11 894 7226/7/8
Fax: 086 604 1778
e-mail: sales.za@marechal.com

Asia

MARECHAL ELECTRIC Asia Pte Ltd
9 Tagore Lane
#01-05 9@Tagore
Singapore 787472
Tel.: +65 6554 2722
Fax: +65 6455 9077
e-mail: sales.asia@marechal.com

Australia

MARECHAL AUSTRALIA PTY LTD
20 Technology Circuit
HALLAM VIC 3803
Australia
Tél. : +61 (0)3 8786 2500
Fax : +61 (0)3 8786 2511
e-mail : sales@marechal.com.au

China

MARECHAL ELECTRIC (CHINA) Co., Ltd
11 North Xiangshui Road,
West Dayawan District,
Huizhou.P.R.C
Tel/Fax: +86 (0)752-5319536
e-mail: sales.cn@marechal.com

Germany/Austria/Switzerland/ East Europe/Russia

MARECHAL GmbH
Im Lössenfeld 8
D-77731 Willstätt-Sand
Germany
Tel.: +49 (0)7852/91 96-0
Fax: +49 (0)7852/91 96-19
e-mail: info.de@marechal.com

Middle East

Technor Middle East DMCC
Unit No.2101, Fortune Executive
Tower, Plot No T1
Jumeirah Lakes Towers
P.O. Box 392054
Dubai, United Arab Emirates
Tel.: +971 4 362 1418
Fax: +971 4 362 1419
e-mail: sales.me@marechal.com

USA/Canada/Mexico

MELTRIC Corporation
4765 W. Oakwood Park Drive
Franklin WI 53132, USA
Tel.: +1 414 433 2700
Fax: +1 414 433 2701
e-mail: mail@meltric.com

TECHNOR

TECHNOR ITALSMEA S.p.A.
Via Italia 33,
20060 Gessate (MILANO)
Italia
Tél. : +39 02 95 00 151
Fax : +39 02 95 00 15 27
e-mail: sales@italisme.com

For any other country or area, please contact head office.

marechal.com

 **MARECHAL
ELECTRIC**
MARECHAL® MELTRIC® RETTBOX® TECHNOR®