



THE ESSENTIAL

UP TO 1250 A



LASER MARKING


Simple and permanent product identification.

QR CODE

Instant access to instructions for use.

ANTIBACTERIAL TREATMENT

Contamination prevention.

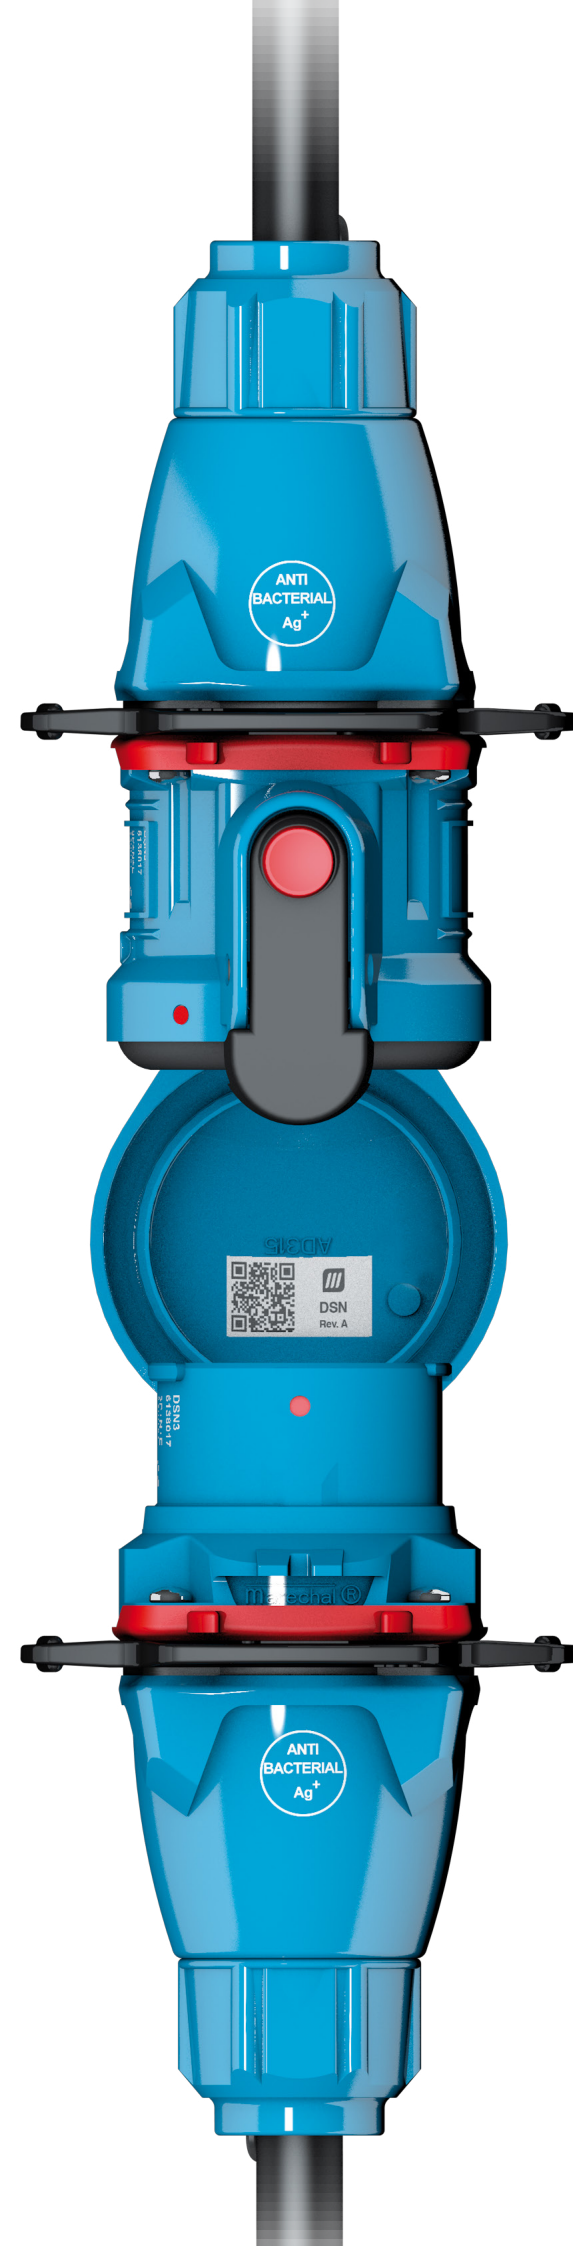

SUMMARY

Since 1952, MARECHAL ELECTRIC has been the reference in terms of power connection safety.



At the heart of innovation MARECHAL ELECTRIC continues to invest in the most advanced materials and reliable technologies.

MARECHAL® offers both for industrial and Ex environments, connectors, socket-outlets, switch-rated DECONTACTOR™ socket-outlets and the first separable switch-disconnector EVO40.

All of our products are designed, manufactured and controlled in France, in strict compliance with the requirements of international IEC, EN and UL standards.

EVO40 SWITCH-DISCONNECTOR 18.5 kW	4
ANTIBACTERIAL SERIES	8
COMPACT SOCKET 16/30 A.....	9
DECONTACTOR™	
AN UNRIVALLED LEVEL OF SAFETY	10
DECONTACTOR™ 20 A	12
DECONTACTOR™ 32 A	13
DECONTACTOR™ 63 A	14
DECONTACTOR™ 90 A	15
DISTRIBUTION BOX 16 - 90 A	15
DECONTACTOR™ 125 A/150 A	16
DECONTACTOR™ 200 A/250 A	17
HEAVY-DUTY PLUGS & SOCKETS UP TO 660 A	19
SINGLE POLE POWER CONNECTOR FROM 400 TO 1250 A	20
MULTICONTACT FROM 7 TO 37 PIN	22
MAKING MOBILITY SAFE.....	24
RETTBOX®S 20 A/32 A	25
SOCKET OR JUNCTION BOXES.....	26
JUNCTION BOXES	26

EVO40 18.5 kW SEPARABLE SWITCH- DISCONNECTOR

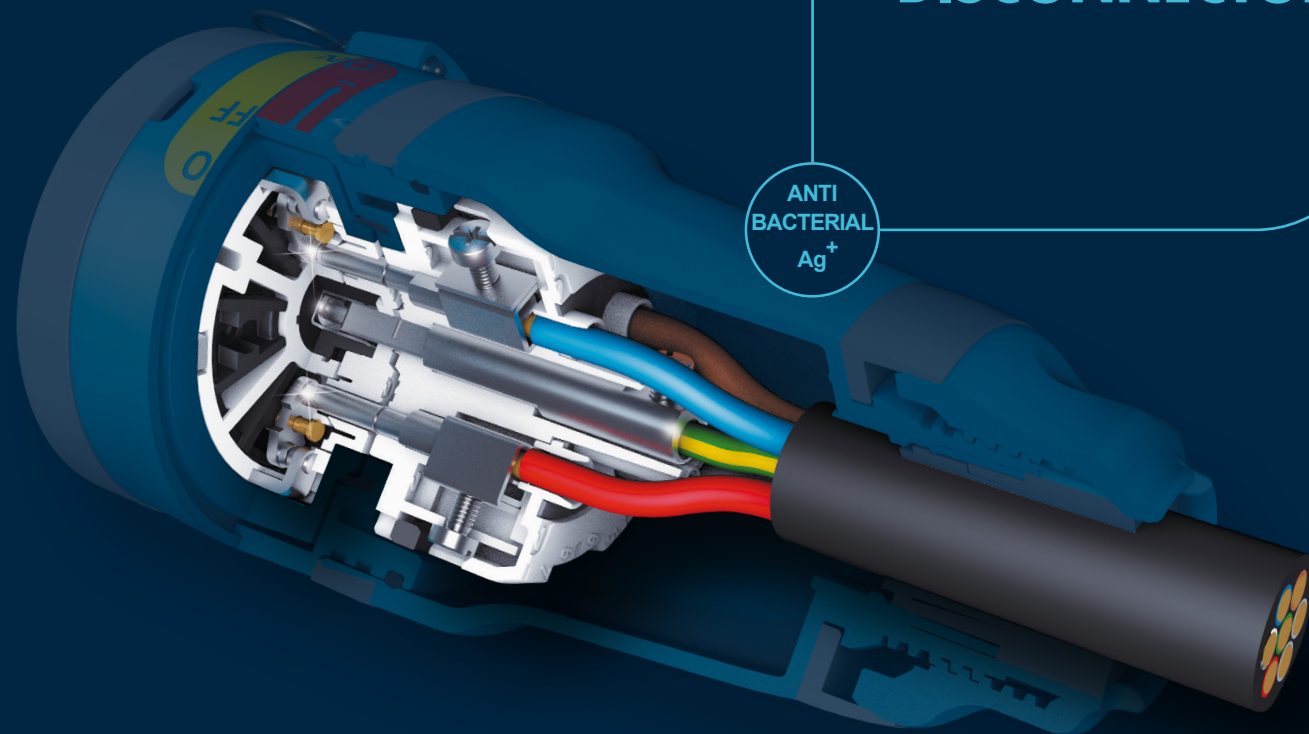

Switch-disconnectors in the AC-22A/AC-23A (18.5 kW) and AC-3 (11 kW) categories.
Up to 6 poles + earth.

LOAD-BREAKING CAPACITY

kW/V	230 V	400 V	690 V
AC-21A/AC-22A	40 A	40 A	40 A
AC-23A	11 kW	18,5 kW	18,5 kW
AC-3	7,5 kW	11 kW	11 kW



Contacts with silver-nickel tips.
Exceptional connection quality.



Padlockable in OFF position for strict compliance with LOTO procedures.



IP4X/IPXXD safety shutter.
Optimum protection against electric shock.
No access to live parts.



IK09. Glass-fibre reinforced poly enclosure.



IP66/IP67/IP69 in ON and OFF positions.

EVO40 is a separable switch-disconnector with a manual rotary selector switch included, from 2 to 6 poles. It is designed for making and breaking on load as well for low voltage circuit current interruption, as per IEC/EN 60947-3 standard. Its robust mechanism enables opening and separation, even in overload and overvoltage cases (AC-23/AC-3).

EVO OFFERS:


- better continuity of service:
 - no need for a 30 mA residual current device (RCD): no nuisance tripping,
 - reduced and simplified maintenance,
 - reduced downtimes,
- compact design: space and cost savings,
- securing and simplifying interventions: for maintenance or replacement of an equipment, EVO can be separated in two parts and padlocked. When separated, EVO has an IP4X/IPXXD rating. There is therefore no need for electrically-qualified personnel nor for protection procedures to be followed.

VISIBLE AND FULLY APPARENT BREAKING


ADDITIONAL FEATURES

- Electrical endurance of **15,000 cycles** (when used with In AC-23A 690VAC/40 A).
- Rated insulation voltage up to 1000VAC.
- **Fast double** current interruption per pole with **clear visible break**.
- Self-cleaning silver alloy contacts with silver-plated tips and a unique and patented "twist" mechanism.
- **Compact design** (50° or 90° angled versions wall box).
- Up to 12 keying positions.

STANDARD INSTALLATION



30 mA
residual
current device
+
Circuit breaker




rotary switch
disconnecter



Cable coupler



EVO SOLUTION



Circuit breaker

EVO



18,5 kW




U MAX
690 V



EVO40

- 2,5-10 mm² ^(a)
2,5-16 mm² ^(b)
- Antibacterial
- IP66/IP67
IP69
- POLY
- IK09
- 25 °C
+60 °C
- AC-21/AC-22
AC-23/AC-3

^(a) Flexible. ^(b) Stranded.

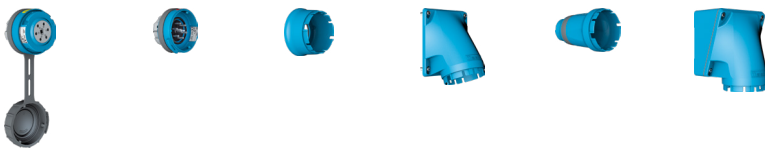

Voltage	Poles	Supply	Load	Straight sleeve	70° inclined sleeve	Handle ⁽¹⁾	90° wall box ⁽²⁾
190-250 V AC	6P+E	814403W*	814803W*	51LM0	51LM7	511P0D21AG	51LC9000
380-440 V AC	6P+E	814401W*	814801W*	51LM0	51LM7	511P0D21AG	51LC9000
660-690 V AC	6P+E	814405W*	814819W*	51LM0	51LM7	511P0D21AG	51LC9000
Load side cap IP66/IP67 padlockable		Included					

⁽¹⁾ Gland size 5-21 mm.
⁽²⁾ Without drilling, top entry. Reversible wall box for 50° angle with bottom entry.
* For 2P+E versions, replace the last digit of the reference by 2, for 3P+E versions, by 3, and for 4P+E versions, by 4.

ADDITIONAL PADLOCKING KEYS


Packaging = 10 814A541

SAFETY HASP FOR UP TO 6 PADLOCKS

613A541



A padlocking key is supplied with each supply/load.

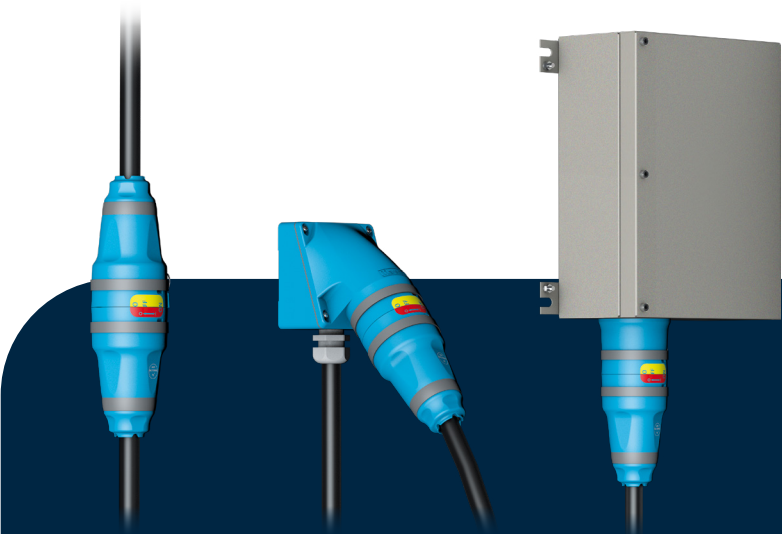

POSSIBLE
INSTALLATIONS



ANTIBACTERIAL

A new safety requirement

Made from a selection of resistant materials, our poly handles, injected with silver ions (Ag⁺), provide an effective, long-lasting barrier that limits the proliferation of bacteria.

A wide range of applications

Pharmaceutical industry, food industry, chemical industry, healthcare facilities, industrial kitchens, water treatment... all sectors of activity are concerned. The high temperature tolerance of the antibacterial additive makes it ideal for use in all high temperature cleaning processes.

ANTI
BACTERIAL
Ag⁺

GET ALL THE BENEFITS OF MARECHAL® TECHNOLOGY



Simple, precise identification

The laser marking on the handle guarantees antibacterial treatment.



Healthy and safe environments

Using "antibacterial" treated accessories reduces the presence of microorganisms and the risk of contamination in many industries.



Safe to use

The active ingredient complies with regulations on biocides.



Excellent performance

Mechanical performance, watertightness and UV resistance remain fully in line with MARECHAL® standards.



A long-lasting additive

The antibacterial additive is not a coating, it is injected into the mass.



Resistant to high temperatures

The antibacterial treatment applied to MARECHAL® products is resistant to high temperatures and retains its effectiveness.

16 A

U MAX
480 V

COMPACT CONNECTOR



PNC



5 A
Available



0.75-2.5 mm²



IP66/IP67
IP69



POLY



IK08



-40°C
+100°C



Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
480 V AC/V DC	5P	01E4007	01E4007	01E4007	01E3007 ⁽¹⁾	01E1007 ⁽¹⁾	01E8007
	+ accessories	/	551M3 +251A457-E	551B3M20 +251A457-E	/	/	/

⁽¹⁾ Gland size 11-15 mm.

30 A

U MAX
500 V

COMPACT PLUGS & SOCKETS



PN



2.5-10 mm² ^(a)
2.5-16 mm² ^(b)



Antibacterial



IP66/IP67



POLY
METAL




IK09



-40°C
+60°C

^(a) Flexible. ^(b) Stranded.

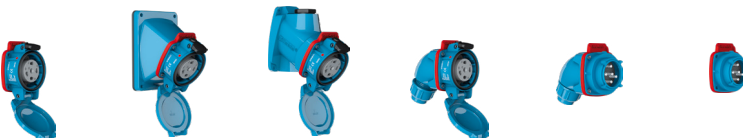

i Metal references are available in the main catalogue or marechal.com.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
190-250 V AC	1P+N+E + accessories	01N4015 /	01N4015 511M3	01N4015 511B3M20 ⁽¹⁾	01N4015 511P6D18AG ⁽²⁾	01N8015 511P6D18AG ⁽²⁾	01N8015 /
380-440 V AC	3P+E + accessories	01N4013 /	01N4013 511M3	01N4013 511B3M20 ⁽¹⁾	01N4013 511P6D18AG ⁽²⁾	01N8013 511P6D18AG ⁽²⁾	01N8013 /
190-250 V AC 380-440 V AC	3P+N+E + accessories	01N4017 /	01N4017 511M3	01N4017 511B3M20 ⁽¹⁾	01N4017 511P6D18AG ⁽²⁾	01N8017 511P6D18AG ⁽²⁾	01N8017 /

⁽¹⁾ M20 threading - ⁽²⁾ Gland size 9-18 mm.
The main catalogue contains all the available contacts configurations.

ACCESSORIES AND OPTIONS



Locking with padlock
ø 4 mm (padlocks
not supplied)



Inlet cap



180° Opening lid




Self-returning
lid (without full
closure IP40)

PRODUCT	Locking with padlock ø 4 mm (padlocks not supplied)	Inlet cap	180° Opening lid	Self-returning lid (without full closure IP40)
PN	Socket ref. + 843	01NA426	Socket ref. + 10	Socket ref. + R
PNC	/	01EA126	/	/

DECONTACTOR™ AN UNRIVALLED SAFETY LEVEL

The only socket-outlet with built-in switch
up to **250 A/110 kW**.

ANTI
BACTERIAL
Ag⁺



Built-in switch up to 250 A.



**Padlocking facility for strict
compliance with LOTO procedures.**



**Spring-mounted crimped braid and
butt contacts with silver-nickel tips.**
Exceptional connection quality.



Elastic ring connection terminals.
Prevent terminal loosening due to
conductor creep, vibration or thermal
shock.




IP4X/IPXXD safety shutter.
Optimum protection against electric
shock.
No access to live parts.



Poly IK09 or metal IK10 enclosures.
Resistant to the harshest environments
(mechanical shock, vibration, EMC,
corrosion).



Standard IP66/IP67/IP69.



MAIN OPTIONS



LOCKOUT-TAGOUT CAPABILITY

The use of MARECHAL® products can be part
of your LOCKOUT-TAGOUT procedures.



STOP-LATCH

This option is ideal for quick disconnection
of machinery and equipment by employees
wearing gloves.

The latch is fitted with a red label with
warning «stop» for ease of identification.

**The use of this latch is not recommended in
case of extension cables.**



IN-LINE CONNECTIONS

A pair of finger draw plates to aid closing.



SELF-EJECTING SERIES

Self-ejecting systems avoid damage to
the electrical installation when the mobile
equipment is moved.



INDUSTRIAL/DOMESTIC ADAPTER

In order to allow the connection of an
appliance fitted with a domestic plug
to an industrial type socket-outlet,
MARECHAL ELECTRIC has developed an
adapter which features a MARECHAL® single
phase industrial plug and a 10/16 A - 230 V
domestic socket. The adapter includes a
6 x 32 mm 10/16 A fuse-link.

Part numbers (P/N°) for these products:

TYPE		DSN1	DSN3	DS1	PN
France 16 A fuse	Poly	6118015D11	6138015D11	3118015D11	01N8015D11
	Metal	-	-	-	09N8015D11
United Kingdom 16 A fuse	Poly	6118015D40	6138015D40	3118015D40	01N8015D40
	Metal	-	-	-	09N8015D40
Germany 16 A fuse	Poly	6118015D30	6138015D30	3118015D30	01N8015D30
	Metal	-	-	-	09N8015D30
Italy 16 A fuse	Poly	6118015D06	6138015D06	3118015D06	01N8015D06
	Metal	-	-	-	09N8015D06

20 A

U MAX
500 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DSN1

1-2.5 mm² (a)
1.5-4 mm² (b)Anti-
bacterial2
PILOTSIP66/IP67
IP69

POLY



IK09

-40°C
+60°CAC-22
AC-23

(a) Flexible. (b) Stranded.

Metal version available soon.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
190-250 V AC	1P+N+E + accessories	6114015 /	6114015 511M3	6114015 511B3M20 ⁽¹⁾	6114015 511P0D18AG ⁽²⁾	6118015 511P0D18AG ⁽²⁾	6118015 /
380-440 V AC	3P+E + accessories	6114013 /	6114013 511M3	6114013 511B3M20 ⁽¹⁾	6114013 511P0D18AG ⁽²⁾	6118013 511P0D18AG ⁽²⁾	6118013 /
190-250 V AC 380-440 V AC	3P+N+E + accessories	6114017 /	6114017 511M3	6114017 511B3M20 ⁽¹⁾	6114017 511P0D18AG ⁽²⁾	6118017 511P0D18AG ⁽²⁾	6118017 /

⁽¹⁾ M20 threading - ⁽²⁾ Gland size 9-18 mm.

The main catalogue contains all the available contacts configurations.

20 A

U MAX
550 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DXN1

ZONE
1, 211-4 mm² (a)
1.5-6 mm² (b)

IP66/IP67



POLY



IK09

-40°C
+60°C

(a) Flexible. (b) Stranded.

II 2 G D Ex db eb IIC T6/T5 Gb Ex tb IIIC T70°C/T90°C Db

Available for zones 2-22 without breaking capacity. Metal version available soon.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
190-250 V AC	1P+N+E + accessories	2514015 /	2514015 251A057	2514015 251AB53 ⁽¹⁾	2514015 251A753 ⁽¹⁾	2518015 251A753 ⁽¹⁾	2518015 /
380-440 V AC	3P+E + accessories	2514013 /	2514013 251A057	2514013 251AB53 ⁽¹⁾	2514013 251A753 ⁽¹⁾	2518013 251A753 ⁽¹⁾	2518013 /
380-440 V AC	3P+N+E + accessories	2514017 /	2514017 251A057	2514017 251AB53 ⁽¹⁾	2514017 251A753 ⁽¹⁾	2518017 251A753 ⁽¹⁾	2518017 /

⁽¹⁾ Gland size 10-14 mm.

The main catalogue contains all the available contacts configurations.

ACCESSORIES
AND OPTIONSIn-line connections
(a pair of finger draw
plates to aid closing)

Inlet cap IP66/IP67

Self-returning lid
(without full
closure IP40)Locking pin for
2 padlocks Ø 8 mm
(padlocks not supplied)

DECONTACTOR™	In-line connections (a pair of finger draw plates to aid closing)	Inlet cap IP66/IP67	Self-returning lid (without full closure IP40)	Locking pin for 2 padlocks Ø 8 mm (padlocks not supplied)
DSN1	611A346	611A426	Socket ref. + R	Socket ref. + 843
DXN1	611A346	Included	Socket ref. + R	Socket ref. + 843

32 A

U MAX
690 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DSN3

2.5-6 mm² (a)
2.5-10 mm² (b)Anti-
bacterial

2 AUX

IP66/IP67
IP69

POLY



IK09

-40°C
+60°CAC-22
AC-23

(a) Flexible. (b) Stranded.

Metal version available soon.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
190-250 V AC	1P+N+E + accessories	6134015 /	6134015 512M3	6134015 512B3M20 ⁽¹⁾	6134015 512P0D21AG ⁽²⁾	6138015 512P0D21AG ⁽²⁾	6138015 /
380-440 V AC	3P+E + accessories	6134013 /	6134013 512M3	6134013 512B3M20 ⁽¹⁾	6134013 512P0D21AG ⁽²⁾	6138013 512P0D21AG ⁽²⁾	6138013 /
190-250 V AC 380-440 V AC	3P+N+E + accessories	6134017 /	6134017 512M3	6134017 512B3M20 ⁽¹⁾	6134017 512P0D21AG ⁽²⁾	6138017 512P0D21AG ⁽²⁾	6138017 /

⁽¹⁾ M20 threading - ⁽²⁾ Gland size 5-21 mm.

The main catalogue contains all the available contacts configurations.

32 A

U MAX
750 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DXN3

ZONE
1, 212.5-10 mm² (a)
2.5-10 mm² (b)

IP66/IP67



POLY



IK09

-40°C
+60°C

(a) Flexible. (b) Stranded.

II 2 G D Ex db eb IIC T6/T5 Gb Ex tb IIIC T57°C/T77°C Db

Available for zones 2-22 without breaking capacity. Metal version available soon.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
190-250 V AC	1P+N+E + accessories	2534015 /	2534015 253A027	2534015 253AB53 ⁽¹⁾	2534015 253A783 ⁽²⁾	2538015 253A783 ⁽²⁾	2538015 /
380-440 V AC	3P+E + accessories	2534013 /	2534013 253A027	2534013 253AB53 ⁽¹⁾	2534013 253A783 ⁽²⁾	2538013 253A783 ⁽²⁾	2538013 /
380-440 V AC	3P+N+E + accessories	2534017 /	2534017 253A027	2534017 253AB53 ⁽¹⁾	2534017 253A783 ⁽²⁾	2538017 253A783 ⁽²⁾	2538017 /

⁽¹⁾ Gland size 10-14 mm - ⁽²⁾ Gland size 12-18 mm.

The main catalogue contains all the available contacts configurations.

ACCESSORIES
AND OPTIONSIn-line connections
(a pair of finger draw
plates to aid closing)

Inlet cap IP66/IP67

Self-returning lid
(without full
closure IP40)Locking pin for
2 padlocks Ø 8 mm
(padlocks not supplied)

DECONTACTOR™	In-line connections (a pair of finger draw plates to aid closing)	Inlet cap IP66/IP67	Self-returning lid (without full closure IP40)	Locking pin for 2 padlocks Ø 8 mm (padlocks not supplied)
DSN3	613A346	613A426	Socket ref. + R	Socket ref. + 843
DXN3	613A346	253A426	Socket ref. + R	Socket ref. + 843

63 A

U MAX
1 000 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DSN6

*i* Metal version available soon.6-16 mm² ^(a)
10-25 mm² ^(b)Anti-
bacterial

2/4 AUX

IP66/IP67
IP69

POLY



IK09

-40°C
+60°CAC-22
AC-23^(a) Flexible. ^(b) Stranded.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
190-250 V AC	1P+N+E + accessories	6164015 /	6164015 513M3	6164015 513B3M25 ⁽¹⁾	6164015 513P0D30AG ⁽²⁾	6168015 513P0D30AG ⁽²⁾	6168015 /
380-440 V AC	3P+E + accessories	6164013 /	6164013 513M3	6164013 513B3M25 ⁽¹⁾	6164013 513P0D30AG ⁽²⁾	6168013 513P0D30AG ⁽²⁾	6168013 /
190-250 V AC 380-440 V AC	3P+N+E + accessories	6164017 /	6164017 513M3	6164017 513B3M25 ⁽¹⁾	6164017 513P0D30AG ⁽²⁾	6168017 513P0D30AG ⁽²⁾	6168017 /

⁽¹⁾ M25 threading - ⁽²⁾ Gland size 10-30 mm.
The main catalogue contains all the available contacts configurations.

63 A

U MAX
750 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DXN6

*i* Available for zones 2-22
without breaking capacity.
Metal version available soon.ZONE
1, 216-16 mm² ^(a)
6-25 mm² ^(b)

2 AUX



IP66/IP67



POLY



IK09

-40°C
+60°C^(a) Flexible. ^(b) Stranded.

II 2 G D Ex db eb IIC T6/T5 Gb Ex tb IIIC T87°C/T107°C Db



Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
190-250 V AC	1P+N+E + accessories	2564015 /	2564015 256A027	2564015 256AB8840P ⁽¹⁾	2564015 256A753 ⁽²⁾	2568015 256A753 ⁽²⁾	2568015 /
380-440 V AC	3P+E + accessories	2564013 /	2564013 256A027	2564013 256AB8840P ⁽¹⁾	2564013 256A753 ⁽²⁾	2568013 256A753 ⁽²⁾	2568013 /
380-440 V AC	3P+N+E + accessories	2564017 /	2564017 256A027	2564017 256AB8840P ⁽¹⁾	2564017 256A753 ⁽²⁾	2568017 256A753 ⁽²⁾	2568017 /

⁽¹⁾ Gland size 22-32 mm - ⁽²⁾ Gland size 12-18 mm.
The main catalogue contains all the available contacts configurations.ACCESSORIES
AND OPTIONSIn-line connections
(a pair of finger draw
plates to aid closing)

Inlet cap IP66/IP67

Self-returning lid
(without full
closure IP40)Locking pin for
2 padlocks Ø 8 mm
(padlocks not supplied)

DECONTACTOR™	In-line connections (a pair of finger draw plates to aid closing)	Inlet cap IP66/IP67	Self-returning lid (without full closure IP40)	Locking pin for 2 padlocks Ø 8 mm (padlocks not supplied)
DSN6	616A346	616A426	Socket ref. + R	Socket ref. + 843
DXN6	616A346	256A426	Socket ref. + R	Socket ref. + 843

90 A

U MAX
1 000 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DS6

*i* Metal references are available in the
main catalogue or marechal.com.10-25 mm² ^(a)
10-35 mm² ^(b)

2/4 AUX



IP66/IP67

POLY
METALIK09
IK10-40°C
+60°CAC-22
AC-23^(a) Flexible. ^(b) Stranded.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
190-250 V AC	1P+N+E + accessories	3164015 ⁽³⁾ /	3164015 ⁽³⁾ 514M3	3164015 ⁽³⁾ 514B3M40 ⁽¹⁾	3164015 ⁽³⁾ 514P0D35 ⁽²⁾	3168015 ⁽³⁾ 514P0D35 ⁽²⁾	3168015 ⁽³⁾ /
380-440 V AC	3P+E + accessories	3164013 ⁽³⁾ /	3164013 ⁽³⁾ 514M3	3164013 ⁽³⁾ 514B3M40 ⁽¹⁾	3164013 ⁽³⁾ 514P0D35 ⁽²⁾	3168013 ⁽³⁾ 514P0D35 ⁽²⁾	3168013 ⁽³⁾ /
190-250 V AC 380-440 V AC	3P+N+E + accessories	3164017 ⁽³⁾ /	3164017 ⁽³⁾ 514M3	3164017 ⁽³⁾ 514B3M40 ⁽¹⁾	3164017 ⁽³⁾ 514P0D35 ⁽²⁾	3168017 ⁽³⁾ 514P0D35 ⁽²⁾	3168017 ⁽³⁾ /

⁽¹⁾ M40 threading - ⁽²⁾ Gland size 13-35 mm - ⁽³⁾ For 100 A version add suffix -228.
The main catalogue contains all the available contacts configurations.

Up to 90 A

CD

⁽¹⁾ These characteristics may
be modified by the installation
of certain components
(e.g. IP44 domestic sockets).

Casing features :

IP66/
IP69 ⁽¹⁾GRP ⁽¹⁾IK09 ⁽¹⁾-40°C
+60°C ⁽¹⁾

DISTRIBUTION BOX

i Configurations available upon request.*i* You will find out our entire boxes range
in the main catalogue or marechal.com
(POLY, stainless steel, etc.).

- ▶ IP66/IP69 water-and dust-tight
- ▶ Up to 10 modules
- ▶ Up to 2x 63 A DECONTACTOR™
- ▶ Complies with IEC/EN 61439-1 and IEC/EN 61439-3

- ▶ Composed of two parts fixed on hinges
- ▶ Pre-wired
- ▶ UV protected

ACCESSORIES
AND OPTIONSIn-line connections
(a pair of finger draw
plates to aid closing)

Inlet cap IP66/IP67

Locking pin for
2 padlocks Ø 8 mm
(padlocks not supplied)

DECONTACTOR™	In-line connections (a pair of finger draw plates to aid closing)	Inlet cap IP66/IP67	Locking pin for 2 padlocks Ø 8 mm (padlocks not supplied)
DS6	316A346	316A426	Socket ref. + 843

150 A

U MAX
1 000 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DS9



i Metal references are available in the main catalogue or marechal.com.

^(a) Flexible. ^(b) Stranded.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
380-440 V AC	3P+E + accessories	3194013 /	3194013 515M3	3194013 595C3M40 ⁽¹⁾	3194013 555P0D35 ⁽²⁾	3198013 555P0D35 ⁽²⁾	3198013 /
190-250 V AC	3P+N+E + accessories	3194017 /	3194017 515M3	3194017 595C3M40 ⁽¹⁾	3194017 555P0D35 ⁽²⁾	3198017 555P0D35 ⁽²⁾	3198017 /
380-440 V AC							

⁽¹⁾ M40 threading - ⁽²⁾ Gland size 25-35 mm.

The main catalogue contains all the available contacts configurations.

125 A

U MAX
750 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DX9

^(a) Flexible. ^(b) Stranded.

Ⓔ II 2 G Ex de IIC T6/T5 tD A21 T80°C/T90°C

Voltages	Pole configuration	Wall mounting socket	Coupler socket	Plug
380-440 V AC	3P+E + accessories	2694013 269AB5350M ⁽¹⁾	2694013 269A95350M ⁽¹⁾	269101350M ⁽¹⁾
380-440 V AC	3P+N+E + accessories	2694017 269AB5350M ⁽¹⁾	2694017 269A95350M ⁽¹⁾	269101750M ⁽¹⁾

⁽¹⁾ Gland size 23-35 mm.

The main catalogue contains all the available contacts configurations.

ACCESSORIES
AND OPTIONS

DECONTACTOR™	Locking pin for 2 padlocks 8 mm (padlocks not supplied)	Inlet cap IP66/IP67	Inlet cap IP65
DS9	Socket ref. + 843	319A426	/
DX9	Included	/	269A926

250 A

U MAX
1 000 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DS2



i Available in 350 A version without breaking capacity.

^(a) Flexible. ^(b) Stranded.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
380-440 V AC	3P+E +	3924013 /	3924013 596M6	3924013 596E6M63 ⁽¹⁾	3924013 556P0D49 ⁽²⁾	3928013 556P0D49 ⁽²⁾	3928013 /
190-250 V AC	3P+N+E +	3924017 /	3924017 596M6	3924017 596E6M63 ⁽¹⁾	3924017 556P0D49 ⁽²⁾	3928017 556P0D49 ⁽²⁾	3928017 /
380-440 V AC							

⁽¹⁾ M63 threading - ⁽²⁾ Gland size 45-49 mm.

The main catalogue contains all the available contacts configurations.

200 A

U MAX
750 VDECONTACTOR™
SWITCH + SOCKET-OUTLET

DX2

^(a) Flexible. ^(b) Stranded.

Ⓔ II 2 G D Ex de IIC T3 tD A21 T91°C

Voltages	Pole configuration	Wall mounting socket	Coupler socket	Plug
380-440 V AC	3P+E + accessories	2674013 267AB53 ⁽¹⁾	2674013 267A963 ⁽¹⁾	2671013 ⁽¹⁾ /
380-440 V AC	3P+N+E + accessories	2674017 267AB53 ⁽¹⁾	2674017 267A963 ⁽¹⁾	2671017 ⁽¹⁾ /

⁽¹⁾ Gland size 36-48 mm.

The main catalogue contains all the available contacts configurations.

ACCESSORIES
AND OPTIONS

DECONTACTOR™	Locking pin for 2 padlocks 8 mm (padlocks not supplied)	Inlet cap IP66/IP67	Inlet cap IP65
DS2	Socket ref. + 453	392A426	/
DX2	Included	/	267A926




400 A



U MAX
1 000 V

DS4

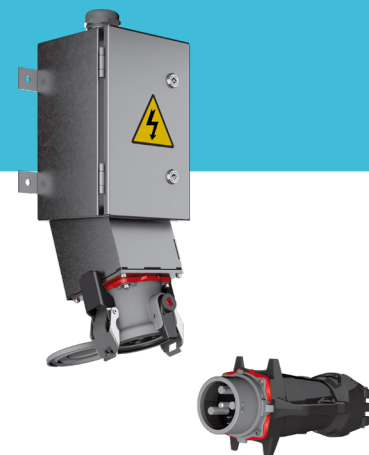

95-150 mm² ^(a)
95-185 mm² ^(b)

2
PILOTS

IP66/IP67

METAL

IK10

-40°C
+60°C

^(a) Flexible. ^(b) Stranded.

i You will find all the references
in the main catalogue or marechal.com.


- Automatic IP66/IP67
- Metal casing (IK10) with epoxy paint
- With a safety shutter 3P+E +2 pilots

660 A



U MAX
1 100 V

P66

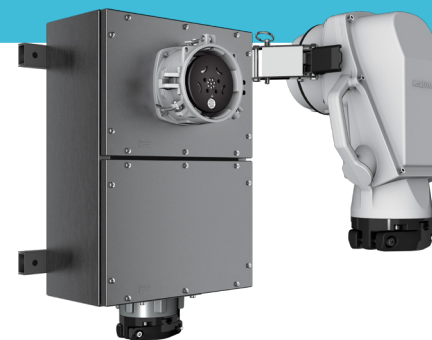

150 - 400 mm² 1 PILOT
8 AUX.

IP66/IP67


METAL

IK10

-40°C
+60°C

i You will find all the references
in the main catalogue or marechal.com.

- I_{max}: 660 A
- U_{max}: 1,100 V AC/1,500 V DC
- Frequency: ≤ 500 Hz
- Number of contacts: 4P+E
- Number of operations: 2,000
- Copper-free aluminium alloy enclosure

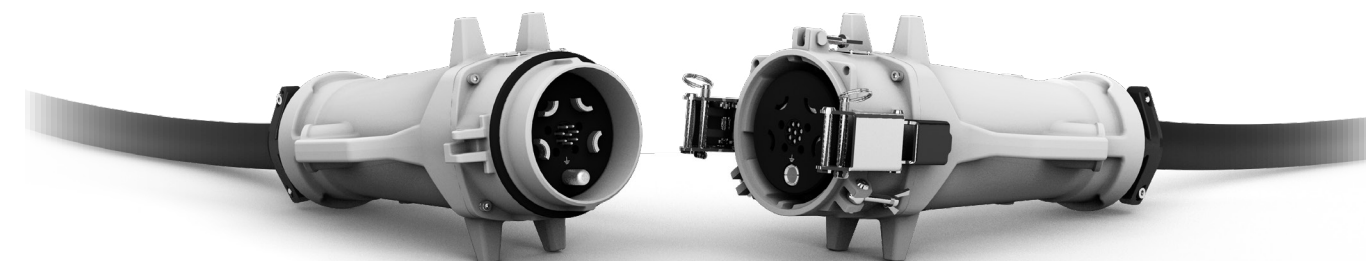

400 A



U MAX
500 V

SINGLE POLE
CONNECTORS



DSP400



^(a) Flexible. ^(b) Stranded.

i You will find all the references
in the main catalogue or marechal.com.

- Automatic IP66/IP67
- Electromechanical interlocking system
- Phases visual and mechanical coding
- Padlocking option

500 A



U MAX
1 000 V

SINGLE POLE
CONNECTORS



CS1000



^(a) Flexible. ^(b) Stranded.

i You will find all the references
in the main catalogue or marechal.com.

- Automatic IP66/IP67
- Visual and mechanical coding
- Padlocking option

800 A



U MAX
1 000 V

SINGLE POLE
CONNECTORS



SP



^(a) Flexible. ^(b) Stranded.

i You will find all the references
in the main catalogue or marechal.com.

- Automatic IP66/IP67 water-and dust-tight
- Electromechanical interlocking system
- Phases visual and mechanical coding
- Padlocking option
- Optional operation lever

1250 A



U MAX
1 000 V



DSP1250



^(a) Flexible. ^(b) Stranded.

i You will find all the references
in the main catalogue or marechal.com.

- Automatic IP66/IP67 water-and dust-tight
- Electromechanical interlocking system
- Phases visual and mechanical coding
- Padlocking option



7 CONTACTS

U MAX
500 VMULTICONTACT
25 A

PN7c



(a) Flexible. (b) Stranded.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
500 V AC	7 pin + accessories	01P4061 /	01P4061 511M3	01P4061 511B3M20 ⁽¹⁾	01P4061 511P0D18AG ⁽²⁾	01P8061 511P0D18AG ⁽²⁾	01P8061 /
480 V AC	7 pin + accessories	09P4061 /	09P4061 591M3	09P4061 591C4M20 ⁽¹⁾	09P4061 591P020M ⁽³⁾	09P8061 591P020M ⁽³⁾	09P8061 /

⁽¹⁾ M20 threading - ⁽²⁾ Gland size 9-18 mm. ⁽³⁾ Gland size 7-13 mm.

12 CONTACTS

U MAX
480 VMULTICONTACT
16 A

PN12c



(a) Flexible.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
480 V AC	12 pin + accessories	01A4001 /	01A4001 511M3	01A4001 511B3M20 ⁽¹⁾	01A4001 511P0D18AG ⁽²⁾	01A8001 511P0D18AG ⁽²⁾	01A8001 /
480 V AC	12 pin + accessories	09A4001 /	09A4001 591M3	09A4001 511B3M20 ⁽¹⁾	09A4001 591P020M ⁽³⁾	09A8001 591P020M ⁽³⁾	09A8001 /

⁽¹⁾ M20 threading - ⁽²⁾ Gland size 9-18 mm.⁽³⁾ Gland size 7-13 mm.ACCESSORIES
AND OPTIONS

PRODUCT	Locking with padlock Ø 4 mm (padlocks not supplied)	Inlet cap	180° Opening lid	Self-returning lid (without full closure IP40)	Bag of 13 females/ males contacts
PN7C	Socket ref. + 843	01NA426	Socket ref. +10	Socket ref. + R	/
PN12C	Socket ref. + 843	01NA426	Socket ref. +10	Socket ref. + R	01AA213 /01AA113

12 CONTACTS

U MAX
480 VMULTICONTACT
16 A

DSN12c



(a) Flexible.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
480 V AC	12 pin + accessories	61A4001 /	61A4001 511M3	61A4001 511C7000 ⁽¹⁾	61A4001 511P0D18 ⁽²⁾	61A8001 511P0D18 ⁽²⁾	61A8001 /

⁽¹⁾ M20 threading - ⁽²⁾ Gland size 9-18 mm.24/37
CONTACTSU MAX
480 VMULTICONTACT
16 ADSN24C
DSN37C

(a) Flexible.

Voltages	Pole configuration	Socket-outlet	Inclined socket	Wall mounting socket	Coupler socket	Plug	Appliance inlet
480 V AC	24 pin + accessories	61B4002 /	61B4002 512M3	61B4002 512C7000 ⁽¹⁾	61B4002 512P0D21AG ⁽²⁾	61B8002 512P0D21AG ⁽²⁾	61B8002 /
480 V AC	37 pin + accessories	61C4003 /	61C4003 513M3	61C4003 513C7000 ⁽¹⁾	61C4003 513P0D30AG ⁽³⁾	61C8003 513P0D30AG ⁽³⁾	61C8003 /

⁽¹⁾ Without threading - ⁽²⁾ Gland size 5-21 mm.⁽³⁾ Gland size 10-30 mm.ACCESSORIES
AND OPTIONS

DECONTACTOR™	Locking pin for 2 padlocks Ø 8 mm (padlocks not supplied)	Inlet cap IP66/IP67	In-line connections (a pair of finger draw plates to aid closing)	Self-returning lid (without full closure IP40)	Bag of 13 females/ males contacts
DSN12C	Socket ref. + 843	611A426	611A346	Socket ref. + R	01AA213/01AA113
DSN24C	Socket ref. + 843	613A426	613A346	Socket ref. + R	01AA213/61CA113
DSN37C	Socket ref. + 843	616A426	616A346	Socket ref. + R	01AA213/61CA113

MAKING MOBILITY SAFE

20 A/32 A

U MAX
480 V

RETTBOX® S



AUTOMATIC
ELECTROMECHANICAL SELF-EJECTION



IP54



POLY



IK08



-40°C
+60°C



i You will find all the references
in the main catalogue or marechal.com.

- Compact, including load-breaking, self-ejecting socket-outlet for mobile applications
- Power supply of an auxiliary battery charger for all equipment on-board a vehicle.
- Reinforced thermoplastics box with 7 contacts and a 12 V/24 V solenoid coil used to eject the mobile socket-outlet upon starting of the vehicle.
- Voltage presence and battery charging light indicators.
- **Air feeding duct in option**

SAFE

RETTBOX® S is the perfect response to your day-to-day safety requirements, automatically disconnecting the power supply when the vehicle is started.

SIMPLE

RETTBOX® S has been designed to make installation easy for you, and can be handled with one hand, whether you're a user, installer or body builder.

SMART

RETTBOX® S has been designed to meet your space and design constraints, thanks to the the symmetry of its plate and its thinness.





U MAX
750 V



B2X



i Contact us to configure the box that meets your needs.

i You will find all the references in the main catalogue or marechal.com.

- ▶ **Ex** II 2 G D Ex e IIC Gb, Ex tb IIIC Db
- ▶ Intrinsic safety capability
- ▶ IP66/IP67 Water-and dust-tight
- ▶ POLY casing, exists with hinges
- ▶ With Ex e certified terminals
- ▶ Terminals configurations for 25 A, 32 A, 45 A and 63 A
- ▶ Dimensions 120x120x90 mm or 160x160x90 mm



U MAX
1000 V



MXBS



i Contact us to configure the box that meets your needs.

i You will find all the references in the main catalogue or marechal.com.

- ▶ **Ex** eb IIC Gb, Ex tb IIIC Db
- ▶ Intrinsic safety capability
- ▶ IP66 Water-and dust-tight
- ▶ Multi-contact connectors and socket-outlets on the same enclosure
- ▶ Socket-outlets configurations up to 680 A
- ▶ POLY casing, aluminium, stainless steel 316L
- ▶ From -55 °C to +60 °C



JUNCTION BOXES

CONTROL STATIONS,
FLAMEPROOF ENCLOSURES,
LED LIGHTING...



DEFINITIONS



Ingress protection
according to IEC/EN 60529

1st digit: protection against solid foreign objects

- 2 = protection against dangerous live parts with a finger
- 4 = protection against dangerous live parts with a wire of a diameter superior or equal to 1mm
- 5 = protection against dust
- 6 = dustproof

2nd digit: protection against ingress of water

- 4 = protection against water splashes
- 5 = protection against water jets
- 6 = protection against powerful water jets (fire hose)
- 7 = protection against a 30-minutes immersion up to 1m
- 8 = protection against a prolonged immersion for a determined period
- 9 = protection against high pressure water jets at high temperature



Index of resistance to mechanical shocks
according to IEC/EN 62262

- IK08 = withstands a shock of 1.7 kg to 30 cm (5 joules)
- IK09 = withstands a shock of 5 kg to 20 cm (10 joules)
- IK10 = withstands a shock of 5 kg to 40 cm (20 joules)



Switching capacity
according to IEC/EN 60947-3

- AC-21 = Resistive on load breaking (simple switchgear, lighting)
- AC-22 = Mix resistive and inductive on load breaking
- AC-23 = High inductive on load breaking (motor)
- AC-3 = Start And Switching Off - Squirrel Cage Motors



Pilot and auxiliary

Pilot

A pilot circuit is meant to electrically control a switchgear that energizes/de-energizes a socket-outlet after plugging, and before unplugging an apparatus, to protect the operator.

This switchgear is controlled:

- by means of a microswitch located inside the socket-outlet (non-crossing pilot circuit), mechanically operated by the plug;
- by means of a contact or a pair of contacts, plug side and socket-outlet side (crossing pilot circuit), that make last and break first (LIFO: last-in/first-out), integrated in the control circuit.

Auxiliaries

Additional to the main contacts, auxiliary contacts are located plug side and socket-outlet side, and are intended for signal, communication, thermistor, etc.

HAZARDOUS AREA CERTIFICATION

ATEX **Ex**


Certification according to European directive 2014/34/EU on all equipments used in or related to explosive atmospheres.

IECEx

Complying with international standards for electrical and non-electrical equipment for use in potentially explosive atmosphere areas.

Presence of potentially explosive atmosphere	Permanent	Occasional	Rare
Zoning for gas & vapours	Zone 0	Zone 1	Zone 2
Zoning for dust & fiber	Zone 20	Zone 21	Zone 22

■ Performance level of MARECHAL® devices.

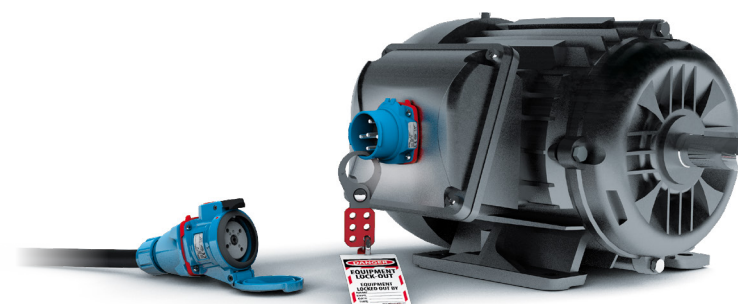

THE SWITCH-RATED
DECONTACTOR™
GUARANTEES THE BEST LEVEL
OF SAFETY.

CONTACT US



MARECHAL ELECTRIC S.A.S. (head office)

5 avenue du chemin de Presles
94410 Saint-Maurice, France
Phone: +33 (0)1 45 11 60 00
Email: contact@marechal.com

Africa SADC area

MARECHAL ELECTRIC AFRICA (PTY) LTD.
PO Box 13875 Witfield 1467
Unit A1 Harvard Lane
Aero Star Business Park
Jet Park Road, Jet Park, South Africa
Phone: +27 11 894 7226/7/8
Email: sales.za@marechal.com

Asia

MARECHAL ELECTRIC Asia Pte Ltd
9 Tagore Lane
#01-05 9@Tagore
Singapore 787472
Phone: +65 6554 2722
Email: sales.asia@marechal.com

Australia

MARECHAL AUSTRALIA PTY LTD
20 A Technology Circuit
Hallam VIC 3803
Australia
Phone: +61 (0)3 8786 2500
Email: sales@marechal.com.au

China

MARECHAL ELECTRIC (China) Co., Ltd
11 North Xiangshui Road,
West Dayawan District,
Huizhou PRC
Phone: +86 (0)752-5319536
Email: sales.cn@marechal.com

Germany/Austria/Switzerland/Eastern Europe/Russia

MARECHAL GmbH
Im Lossenfeld 8
D-77731 Willstätt-Sand
Germany
Phone: +49 (0)7852/91 96-0
Email: info.de@marechal.com

Middle East

MARECHAL ELECTRIC Middle East Trading LLC
80 Street, Shed-01B ALFA3 Complex
Jebel Ali Industrial 1 - Dubai, UAE
Phone: +971 4 226 8400
Email: sales.me@marechal.com

USA/Canada

MELTRIC Corporation
4765 W. Oakwood Park Drive
Franklin, WI 53132, USA
Phone: +1 414 433 2700
Email: mail@meltric.com

Mexico

MELTRIC DE MEXICO S. de R.L. de C.V.
Insurgente Sur 863 – Piso 7
Napoles, Benito Juarez,
D. F. Mexico, C.P. 03810
Phone: +52 55 50056752
Email: scmexico@meltric.com

TECHNOR ITALSMEA S.p.A.

Via Italia 33,
20060 Gessate (Milano),
Italia
Phone: +39 02 95 00 151
Email: sales@italsmea.com

For any other country or area, please contact the head office.
Find your sales contact on marechal.com/contact

marechal.com

technor.com

 **MARECHAL**
ELECTRIC
MARECHAL® TECHNOR® MELTRIC®