

20 A

550 V
U MAX

DECONTACTOR™ DXA1

MARECHAL ELECTRIC FRANCE

Ex II 2 G D

Ex db eb IIC T* Gb

Ex tb IIIC T* Db

-55 °C ≤ Ta ≤ +40 °C

T6

T68 °C

-55 °C ≤ Ta ≤ +60 °C

T5

T88 °C

LCIE 15 ATEX 3033X/IECEx LCIE 15.0030X



IP66
IP67



1-4 mm² (1)
1,5-6 mm² (2)



METALL



IK10



-55 °C
+60 °C



AC-22
AC-23



ATEX



1, 2,
21, 22



EMC

(1) Flexible Verdrahtung (min. - max.).
(2) Starre Verdrahtung (min. - max.)

EINSATZTEMPERATUR

Temperaturklasse Gas

Klasse T6 für Umgebungstemperatur
zwischen -55 °C und +40 °C

Klasse T5 für Umgebungstemperatur
zwischen -55 °C und +60 °C

Oberflächentemperatur Staub

Oberflächentemperatur ≤ 68 °C bei einer Umgebungstemperatur
zwischen -55 °C und +40 °C

Oberflächentemperatur ≤ 88 °C bei einer Umgebungstemperatur
zwischen -55 °C und +60 °C

NORMEN

Internationale und
europäische Normen IEC/EN

60079-0, 60079-1, 60079-7, 60079-31, 60309-1, 60309-4, 60947-3

Schutzart

db eb, tb

**EINBAUDOSE
DXA1**



**EINBAUSTECKER
DXA1**



220-250 V AC	1P+N+E	2914015	2918015
380-440 V AC	3P+E	2914013	2918013
380-440 V AC	3P+N+E	2914017	2918017

**AUFBAUDOSE
DXA1**



**STECKER
DXA1**



220-250 V AC	1P+N+E	M20	8-13 mm	2914015 + 291A053	2918015 + 291A963
220-250 V AC	1P+N+E	M25	9-16 mm	2914015 + 291A05325M	2918015 + 291A95325M
220-250 V AC	1P+N+E	M32	12-21 mm	2914015 + 291A653	2918015 + 291A95332M
380-440 V AC	3P+E	M20	8-13 mm	2914013 + 291A053	2918013 + 291A963
380-440 V AC	3P+E	M25	9-16 mm	2914013 + 291A05325M	2918013 + 291A95325M
380-440 V AC	3P+E	M32	12-21 mm	2914013 + 291A653	2918013 + 291A95332M
380-440 V AC	3P+N+E	M20	8-13 mm	2914017 + 291A053	2918017 + 291A963
380-440 V AC	3P+N+E	M25	9-16 mm	2914017 + 291A05325M	2918017 + 291A95325M
380-440 V AC	3P+N+E	M32	12-21 mm	2914017 + 291A653	2918017 + 291A95332M

**GENEIGTE
ANBAUDOSE
DXA1**



**GENEIGTER
ANBAUSTECKER
DXA1**



220-250 V AC	1P+N+E	2914015 + 291A027	2918015 + 291A027
380-440 V AC	3P+E	2914013 + 291A027	2918013 + 291A027
380-440 V AC	3P+N+E	2914017 + 291A027	2918017 + 291A027

**KUPPLUNGSDOSE
DXA1**



**GERÄTESTECKER
DXA1**



220-250 V AC	1P+N+E	M20	8-13 mm	2914015 + 291A963	2918015 + 291A053
220-250 V AC	1P+N+E	M25	9-16 mm	2914015 + 291A95325M	2918015 + 291A05325M
220-250 V AC	1P+N+E	M32	12-21 mm	2914015 + 291A95332M	2918015 + 291A653
380-440 V AC	3P+E	M20	8-13 mm	2914013 + 291A963	2918013 + 291A053
380-440 V AC	3P+E	M25	9-16 mm	2914013 + 291A95325M	2918013 + 291A05325M
380-440 V AC	3P+E	M32	12-21 mm	2914013 + 291A95332M	2918013 + 291A653
380-440 V AC	3P+N+E	M20	8-13 mm	2914017 + 291A963	2918017 + 291A053
380-440 V AC	3P+N+E	M25	9-16 mm	2914017 + 291A95325M	2918017 + 291A05325M
380-440 V AC	3P+N+E	M32	12-21 mm	2914017 + 291A95332M	2918017 + 291A653

► Auch mit anderen Stromstärken, Spannungen, Frequenzen und Kontaktkonfigurationen erhältlich (siehe Seite 14).



OPTIONEN

Artikelnummer

**VERRIEGELUNGSSTIFT FÜR 2 VORHÄNGESCHLÖSSER Ø 4 - 8 mm
(OHNE VORHÄNGESCHLOSS)**



Art.-Nr. + 843

GUMMIKAPPE IP66/IP67



291A426

**EINZIEHHILFE
(GRIFFFLASCHE, 2 STÜCK)**



291A346

Andere Ex KV auf Anfrage

ELEKTROMAGNETISCHE VERTRÄGLICHKEIT (EMC)


NEU



Bestellen Sie eine Ex EMV-Kabelverschraubung erhältlich auf Seite 318.


ZEICHNUNGEN UND ABMESSUNGEN

STECKER

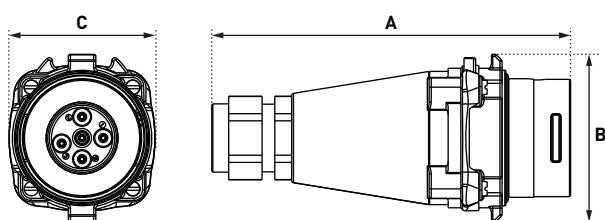


A	B	C
170	79	70

KUPPLUNGSDOSE

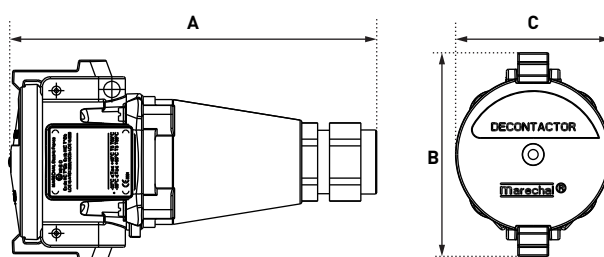


A	B	C
185	103	78

AUFBAUDOSE 30° M20 - M25

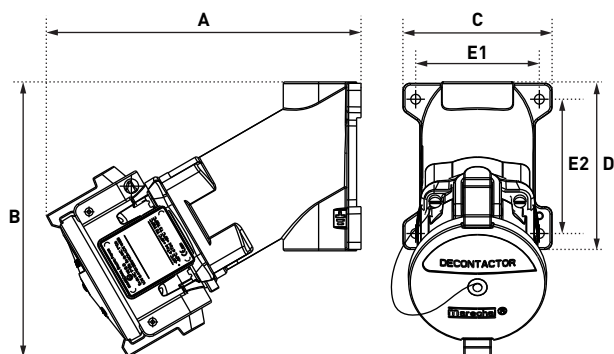


A	B	C	D	E1	E2
178	156	84	95	70	76

AUFBAUDOSE 30° M32

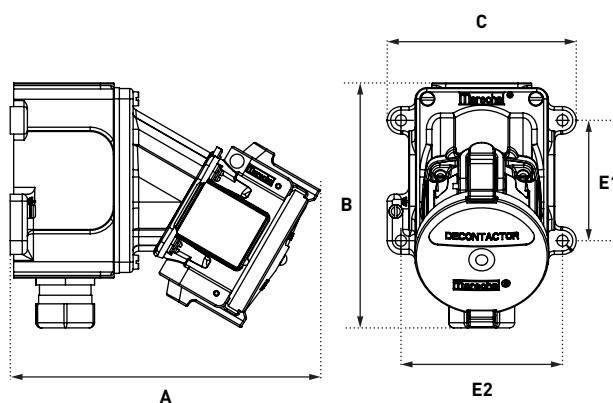


A	B	C	D	E1	E2
---	---	---	---	----	----

GENEIGTE ANBAUDOSE 30°

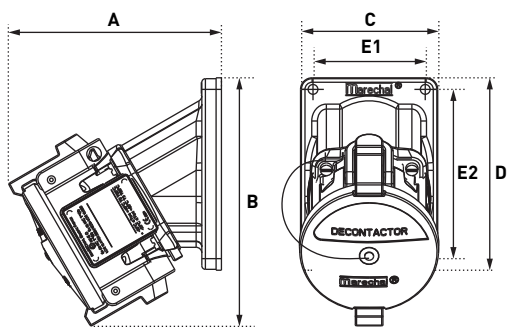


A	B	C	D	E1	E2
120	140	77	108	63	95

GENEIGTER ANBAUSTECKER 30°

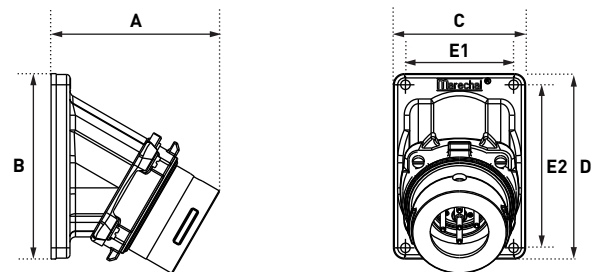


A	B	C	D	E1	E2
98	117	77	108	63	95

GERÄTESTECKER 30° M20 - M25

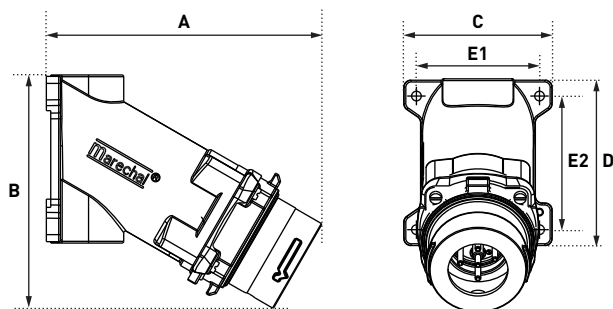

A	B	C	D	E1	E2
157	133	84	95	70	76

GERÄTESTECKER 30° M32

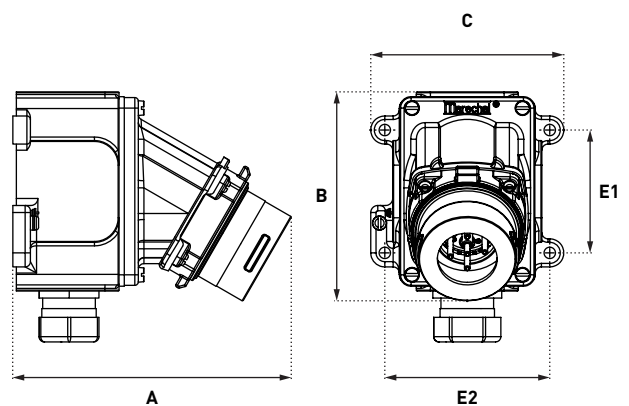

A	B	C	E1	E2
159	119	110	70	94