


LED LIGHTING

EV LED.. Series - Spotlight - Copper free aluminium




- Spotlights are ideally suited for applications where high luminous performances are required without causing neither dazzling nor light pollution.
- Manufactured in copper-free aluminium and suitable for LED lamp

TECHNICAL FEATURES

Material	Copper-free aluminium
IP rating	IP66
Ambient temperature range	-52°C to +60°C
Approvals	ATEX: INERIS 01ATEX0019X - IECEX: INE 15.0031X EAC: RU C-IT.BH02.B.00616/20 - ECAS: 21-04-10282 E21-04-021858
Marking	II 2 GD Ex de IIC T(**) Gb Ex tb IIIC T(**) Db IP66 ** T5/T100°C, T4/T135°C
Gaskets	O-ring made of Nitrile Rubber (NBR)
Surface treatment	Polyurethane painting cycle - Blue RAL5014 (other colour available upon request)
Entries	N° 2 entries M25x1,5 (plugs and cable glands excluded)
Included accessories	AISI304 Stainless steel external hardware and screws
Lamps	Included
Rated operation voltage (UE)	110/240 V
Frequency	50/60 Hz
Photometric light curves	

Dimensions LED EV

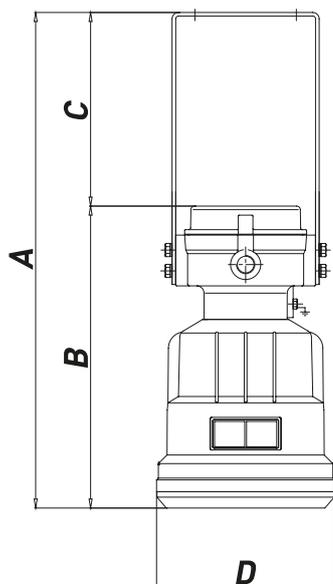

LED EV.. Spot lights

TYPE	CODE	LAMP [W]	WEIGHT [Kg]	TEMP. CLASS	DIMENSIONS [mm]				VOLTAGE
					A	B	C	D	
EVDE-3/LED 18	A0303618D0001	18	6.00	T4*	547	333	214	195	110-24 V

* In case of maximum ambient temperature reaches +40°C, temperature class changes into T5 (ordering code to be required)