

VISUAL SIGNAL

EVCC-TRAFFIC LIGHT




- Traffic light with red and green lamps (customized configurations available upon request)
- LED technology
- Zero maintenance

TECHNICAL FEATURES

Material	Copper-free aluminium
IP rating	IP66
Ambient temperature range	-20°C to +60°C (lower temperatures available upon request)
Approvals	ATEX: INERIS 01ATEX0019X - IECEX: INE 15.0031X EAC: RU C-IT.BH02.B.00616/20 - ECAS: 21-04-10282 E21-04-021858
Marking	II 2GD Ex-d IIC T3 Gb EX-tb IIIC T200°C Db IP66
Gaskets	O-ring made of nitrile rubber (NBR)
Surface treatment	Polyurethane painting cycle - Blue colour RAL5014 (other colour available upon request)
Entries	N° 1 entry M25x1,5
Screws	AISI304 Stainless steel external screws
Lamps	Included
Rated operation voltage (UE)	110/230 V AC 24 V AC/DC
Frequency	50/60 Hz
Power factor	> 0,95

Dimensions EVCC-PR/LED

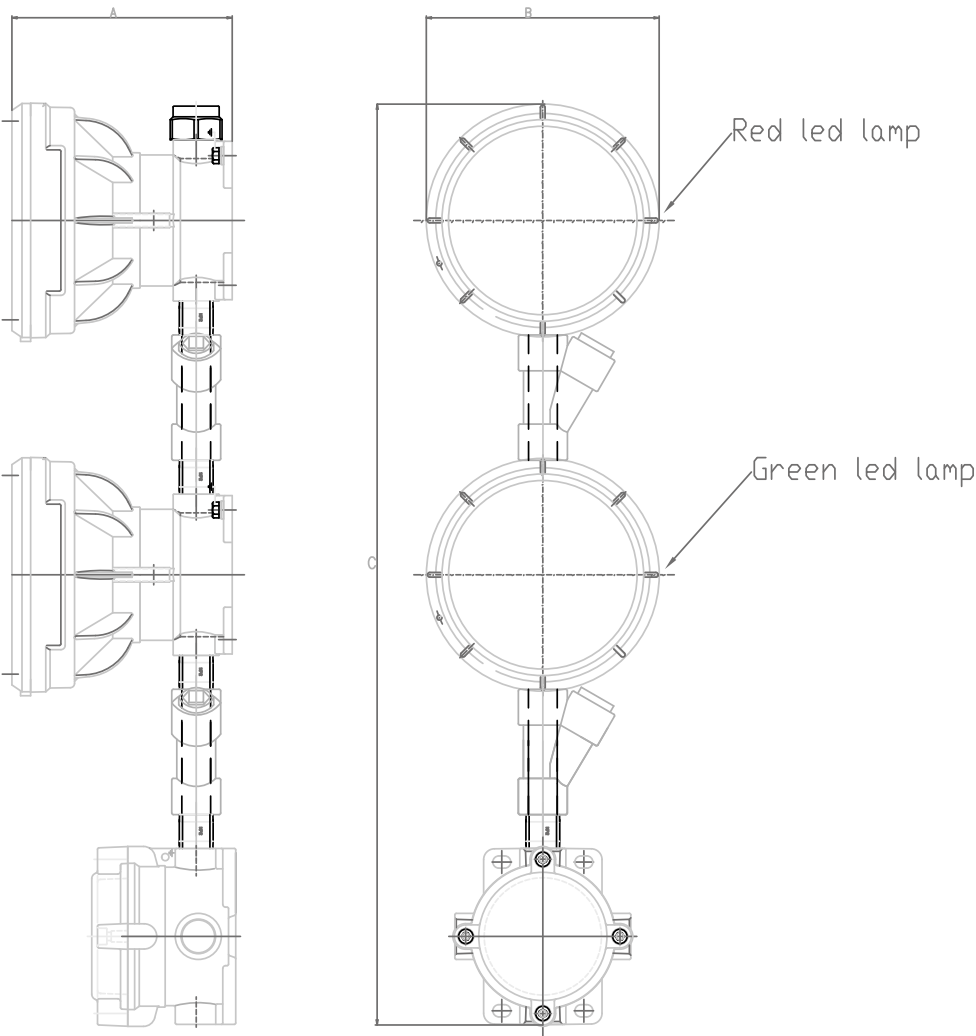

EVCC-PR/LED Traffic light

TYPE	CODE	LAMP [W]	LAMP. TYPE	TEMP. CLASS	VOLTAGE	DIMENSIONS [mm]			AMBIENT TEMPERATURE
						A	B	C	
TRAFFIC LIGHT 2XEVC-PR/LED	A040266700001	5 (RED/GREEN)	LED	T3	110/230 V AC	153	162	640	(-20°C;+60°C)
TRAFFIC LIGHT 2XEVC-PR/LED	A04K221A57112	5 (RED/GREEN)	LED	T3	24 V AC/DC	153	162	640	(-20°C;+60°C)