

EARTHING SYSTEMS

PTA Earthing clamp




- Reliable, robust, handy and easy to use, PTA Series clamps are the ideal tool for tanker loading platform equipped with electronic devices to signal correct grounding
- They can be easily connected to any grip, even rusty ones
- PTA Series is made of copper-free aluminium and the electrical continuity is ensured by the carbonitrided steel contact tips, which make a firm connection to any foothold having a thickness between 2 and 20 mm.

TECHNICAL FEATURES

Material	Copper-free aluminium
IP rating	IP65
Ambient temperature range	-20°C to +55°C
Approvals	ATEX: CESI 03 ATEX 101 X
Marking	II 2 GD Ex d IIC T6 Ex tD A21 IP65 T85°C
Nominal current I_n	10 A
Insulation voltage	3 kV
Optional accessories	Cable reel

Dimensions PTA

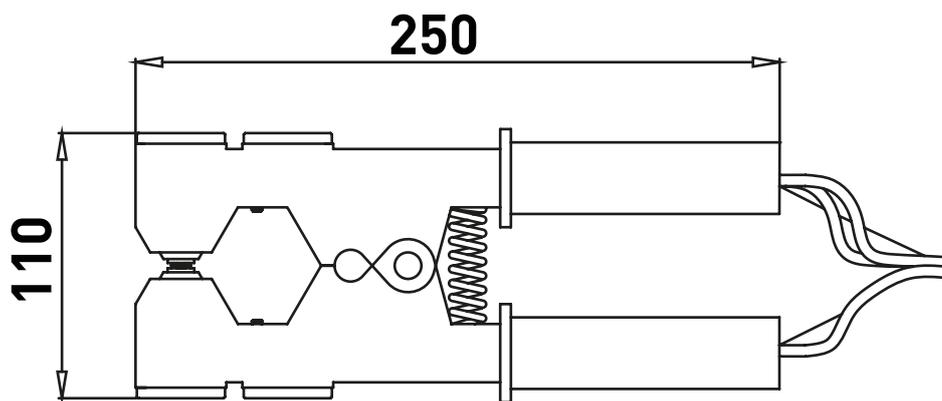

PTA.. Series - Clamps

TYPE	CODE	DIMENSIONS [mm]			WEIGHT [Kg]	CLAMP OPENING [mm]	CABLE TYPE	CABLE LENGHT [mt]
		LENGHT	WIDTH	HEIGHT				
PTA ISEO-1	B091015160001	250	110	35	1.56	3-20	1x6mm ² PUR	11
PTA ISEO-2	B091015160002	250	110	35	3.36	3-20	3x3mm ² PUR	11

PTA ISEO-1: Simply Earth clamp with yellow/green cable.

PTA ISEO-2: Double circuit Earth clamp, suitable to be combined with our Earth control system GUMT-325.