

ENCLOSURES

CDX Series - GRP



High resistance GRP Enclosures, developed and specially designed to host wide range of terminals, multiple DXN socket-outlets or inlet. Tested and certified to be installed and used in hazardous areas (Zones 1, 2, 21 & 22 under ATEX and IECEx).


MARKING

II 2G Ex eb IIC Gb

II 2D Ex tb IIIC Db

TECHNICAL FEATURES

Material	GRP
IP rating	IP66 /IP67
Ambient temperature range	-25°C to +60°C
Approvals	LCIE 24 ATEX 3001 U IECEx LCIE 24.0001U EAC: RU C-FR.AA87.B.01480-25
Standard	International and European IEC/ ENstandards 62262, 60079-0, 60079-7 and 60079-31
Optional accessories	Flat or angled covers Hinges Earth continuity plates Passing through earth bolt
Dimensions	

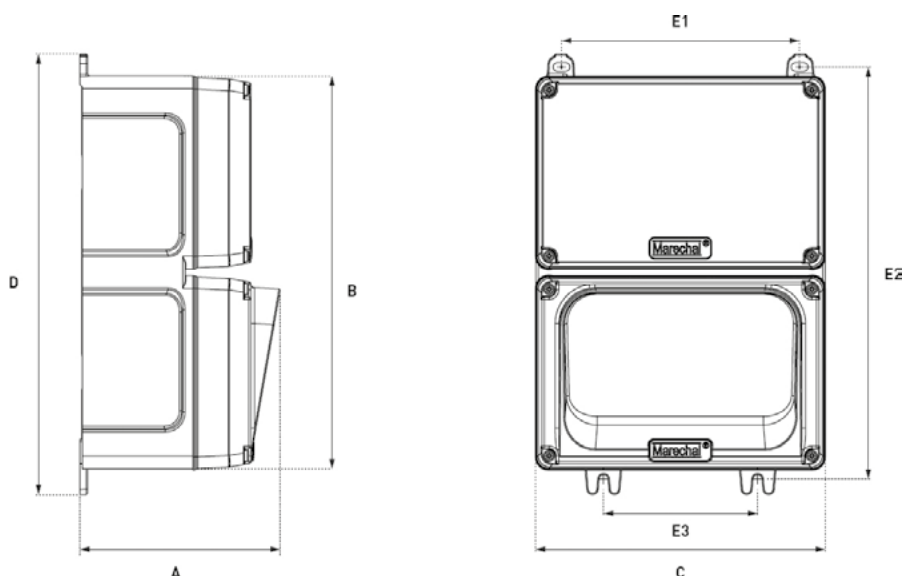

DIMENSION [mm]						
A	B	C	D	E1	E2	E3
156	305	225	342	185	320	120

For complete junction boxes is necessary to ask to the Sales Dept.