

## EARTHING SYSTEMS

### PTA Earthing clamp




- Reliable, robust, handy and easy to use, PTA Series clamps are the ideal tool for tanker loading platform equipped with electronic devices to signal correct grounding
- They can be easily connected to any grip, even rusty ones
- PTA Series is made of copper-free aluminium and the electrical continuity is ensured by the carbonitrided steel contact tips, which make a firm connection to any foothold having a thickness between 2 and 20 mm.

## TECHNICAL FEATURES

<b>Material</b>	Copper-free aluminium
<b>IP rating</b>	IP65
<b>Ambient temperature range</b>	-20°C to +55°C
<b>Approvals</b>	ATEX: CESI 03 ATEX 101 X
<b>Marking</b>	II 2 GD Ex d IIC T6 Ex tD A21 IP65 T85°C
<b>Nominal current I<sub>n</sub></b>	10 A
<b>Insulation voltage</b>	3 kV
<b>Optional accessories</b>	Cable reel

## Dimensions PTA

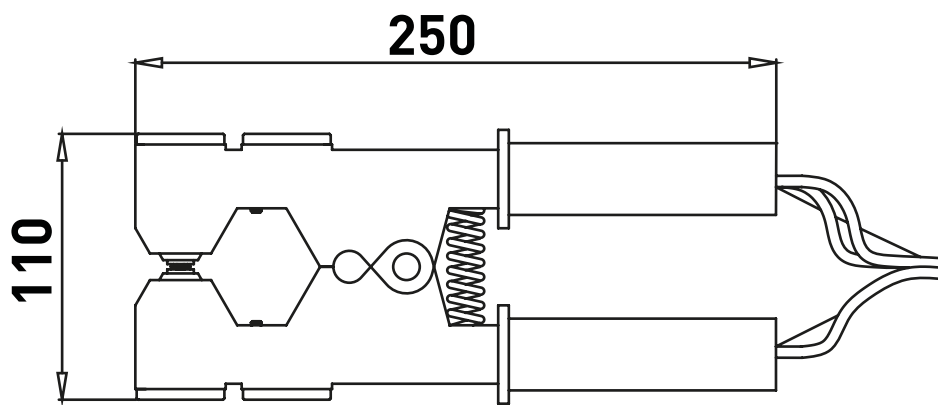

## PTA.. Series - Clamps

TYPE	CODE	DIMENSIONS [mm]			WEIGHT [Kg]	CLAMP OPENING [mm]	CABLE TYPE	CABLE LENGHT [mt]
		LENGHT	WIDTH	HEIGHT				
PTA ISEO-1	B091015160001	250	110	35	1.56	3-20	1x6mm <sup>2</sup> PUR	11
PTA ISEO-2	B091015160002	250	110	35	3.36	3-20	3x3mm <sup>2</sup> PUR	11

PTA ISEO-1: Simply Earth clamp with yellow/green cable.

PTA ISEO-2: Double circuit Earth clamp, suitable to be combined with our Earth control system GUMT-325.