

125 A

DECONTACTOR™ DX9

U MAX
750 V AC
750 V DC

MARECHAL ELECTRIC FRANCE

Ex II 2 G D Ex de IIC tD A21
-40 °C ≤ Ta ≤ +60 °C T5 T90 °C
-40 °C ≤ Ta ≤ +50 °C T6 T80 °C
IECEx LCI 09.0015/LCIE 04 ATEX 6038

INSTRUCTIONS FOR USE



IP65
IP66



35-50 mm² (1)
50-70 mm² (2)



METAL



IK10



-40 °C
+60 °C



ATEX



1, 2,
21, 22



EMC

(1) Flexible wiring (min.-max.).
(2) Stranded wiring (min.-max.).



Other configurations
on request.

Locking position
connected or
disconnected by
lockable shaft.

STANDARDS

International and European
IEC/EN standards

60079-0, 60079-1, 60079-7, 60079-31, 60309-1, 60309-4

Protection mode

de, tD



Each socket-outlet
must be associated
with a box or a handle.

SOCKET-OUTLET
female
DX9



**INCLINED
APPLIANCE**
inlet
DX9



PLUG
male
DX9



380-440 V AC	3P+E	2694013	2696013	16-27 mm	2691013
				23-35 mm	269101350M
				36-48 mm	269101363M
380-440 V AC	3P+N+E	2694017	2696017	16-27 mm	2691017
				23-35 mm	269101750M
				36-48 mm	269101763M

► Other currents, voltages, frequencies and contact configurations are available (see page 21).

REFERENCES AND ACCESSORIES

WALL BOX	Cable gland entry	Cable outer Ø	Reference
----------	-------------------	---------------	-----------

**WALL BOX METAL 90°
EX METAL CABLE GLAND INCLUDED***



M32	12-21 mm	269AB5332M
M40	16-27 mm	269AB53
M50	23-35 mm	269AB5350M
M63	36-48 mm	269AB5363M

* Optional versions for earth continuity are available, please contact us

OPTIONS	Reference
---------	-----------

INLET CAP IP65



269A926

HANDLES	Cable gland entry	Cable outer Ø	Reference
---------	-------------------	---------------	-----------

**STRAIGHT HANDLE METAL
BOX EX METAL CABLE GLAND INCLUDED***



M32	12-21 mm	269A95332M
M40	16-27 mm	269A963
M50	23-35 mm	269A95350M
M63	36-48 mm	269A95363M

ELECTROMAGNETIC COMPATIBILITY (EMC)


Please order a metal threaded accessory herewith, together with a EMC cable gland to be found on page 348.

DRAWINGS AND DIMENSIONS




DOWNLOAD
THE DRAWINGS
ON OUR WEBSITE
marechal.com

PLUG ON WALL MOUNTED SOCKET-OUTLET

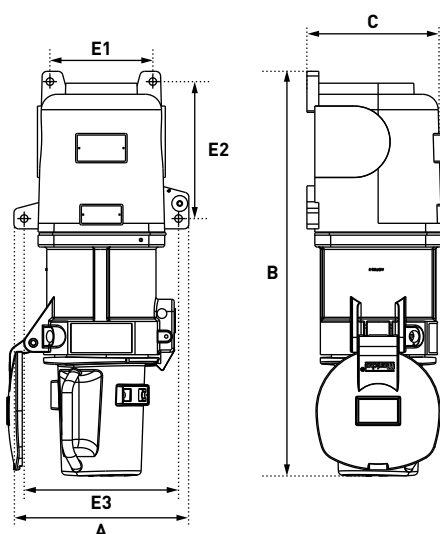

A	B	C	E1	E2	E3
221	511	173	130	173	195

COUPLER

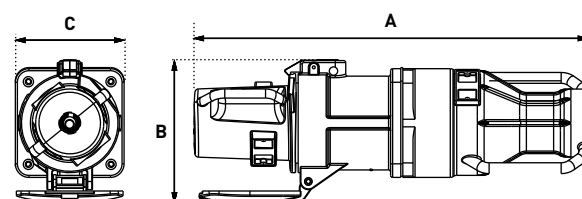

A	B	C
582	212	160